

Model B 28 | Standard-Incubators with mechanical adjustment


With the B series incubator, you get a reliable and powerful unit in a solid configuration at a very attractive price.

BENEFITS

- Safe and reproducible results even under high batch throughputs in long-term operation
- Inner glass door for a stable atmosphere



Model 28

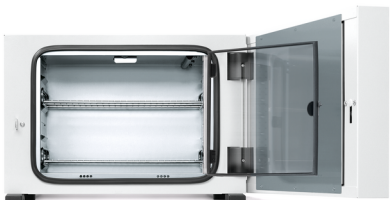

Model 28

IMPORTANT FEATURES

- Temperature range: +30 °C to +70 °C
- Hydro-mechanical thermostat
- Class 1 temperature limitation device
- Inner door made of tempered safety glass
- 2 chrome-plated racks

ORDERING INFORMATION

Interior volume		Power supply - unit fuse	Plug*	Version	Model version	Art.-No.
[cu.ft.]	[L]					
Model B 28						
1	28	120 V 1~ 60 Hz -6,3 A	NEMA 5-15	Standard	Bo28-120V	9010-0067
		230 V 1~ 50/60 Hz -6,3 A	CEE 7/7	Standard	Bo28-230V	9010-0002

TECHNICAL DATA

Data		
Designation	Bo28-230V	Bo28-120V
Article Number	9010-0002	9010-0067
Option model	Standard	Standard
Performance Data Temperature		
Temperature range	30...70 °C	30...70 °C
Temperature uniformity at 37°C	1.5 ± K	1.5 ± K
Temperature fluctuation at 37°C	1.0 ± K	1.0 ± K
Heating up time to 37°C	95 min	95 min
Electrical data		
Rated Voltage	230 V	120 V
Power frequency	50/60 Hz	60 Hz
Nominal power	0,25 kW	0,25 kW
Unit fuse	6,3 A	6,3 A
Phase (Nominal voltage)	1~	1~
Dimensions and weights		
Interior volume	1 cu.ft.	1 cu.ft.
Net weight of the unit (empty)	51 lbs	51 lbs
Load per rack	22 lbs	22 lbs
Permitted load	55 lbs	55 lbs
Wall clearance back	6,3 in	6,3 in
Wall clearance sidewise	3,94 in	3,94 in
Housing dimensions not incl. fittings and connections		
Width net	22.83 in	22.83 in
Height net	15.94 in	15.94 in
Depth net	16.73 in	16.73 in
Internal Dimensions		
Interior width	15.75 in	15.75 in
Interior height	11.02 in	11.02 in
Interior depth	9.84 in	9.84 in


Unit doors	1	1
------------	---	---

Fixtures

Number of shelves (std./max.)	2/4	2/4
-------------------------------	-----	-----

All technical data is specified for unloaded units with standard equipment at an ambient temperature of +22 °C ±3 °C and a power supply voltage fluctuation of ±10%. The temperature data is determined in accordance to BINDER factory standard following DIN 12880, observing the recommended wall clearances of 10 % of the height, width, and depth of the inner chamber. All indications are average values, typical for units produced in series. We reserve the right to change technical specifications at any time.

DIMENSIONS Incl. fittings and connections [mm]

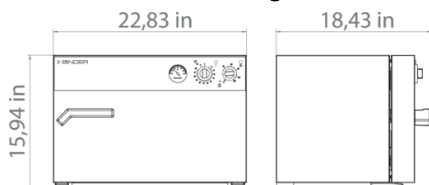

OPTIONS

Designation	Description	B 28	*	Art.-No.
Calibration certificate, expanded	for temperature; for extending the measurement in center of chamber to include another test temperature	•	-	8012-0022
Calibration certificate, temperature	for temperature, measurement in center of chamber at specified temperature	•	-	8012-0030

ACCESSORIES

Designation	Description	B 28	*	Art.-No.
pH-neutral detergent	concentrated, for gentle remove of residual contaminants; 1 kg	•	-	8012-2250
Rack	chrome plated	•	-	8012-2032
Rubber pads	set anti-slip feet	•	-	8012-0702
Shelf, perforated	Stainless steel	•	-	8012-2160

SERVICES

Designation	Description	*	Art.-No.
Calibration services			
Temperature calibration	Calibration of one (1) test temperature specified by the user in center of chamber, including certificate Travel to be quoted separate.	05	DL30-0110
	Extension of calibration of one (1) additional test temperature specified by the user in the center of the usable space, including certificate Travel to be quoted separate.	05	DL30-0102
Installation services			
Unit installation	Connect the unit to the customer-side connections (electricity, water, wastewater, gas), basic functions check, brief operating instructions. (excl.: unpacking, setup,	05	DL10-0160

Designation	Description	*	Art.-No.
	controller instructions, programming, installation work) Travel to be quoted as separate.		
Unit instructions	Instruction regarding operating principle and basic functions of the unit, operation of the control electronics including programming. Travel to be quoted as separate Limited to 3 hours.	05	DL10-0540
Maintenance services			
BRONZE 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate. 10% Discount on Spare Parts and Labor for any additional Services needed Wear + tear parts to be purchased or billed to customer. Travel to be quoted as separate.	05	DL20-0720
GOLD 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate of Temperature. 25% Discount on Spare Parts and Labor for any additional Services needed. One additional courtesy visit per year can be used for service visit or operator. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	05	DL20-0915
Preventive maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Checking a test temperature specified by the user in center of usable space without certificate. Wear + tear parts need to be purchased or billed to customer. Travel to be quoted as separate.	05	DL20-0601
SILVER 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate 15% Discount on Spare Parts and Labor for any additional Services needed One additional courtesy visit per year can be used for service visit or operator training. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	05	DL20-0815
Warranty service			
1-year warranty extension	The warranty is extended by 1 year from the delivery date, wear parts are excluded	05	DL50-0010

NOTES

- 05 Quoted prices do not include travel costs. Please refer to the chapter on BINDER Service for travel costs for your region. Quoted prices for services performed in Switzerland do not include a country-specific added fee (available on request).

BINDER GmbH

Tuttlingen, Germany
TEL +49 7462 2005 0
info@binder-world.com
www.binder-world.com

BINDER Inc.

Bohemia, NY, USA
TEL +1 631 224 4340
usa@binder-world.com
www.binder-world.us

BINDER Environmental Testing Equipment (Shanghai) Co., Ltd.

Shanghai, P.R. China
TEL +86 21 685 808 25
china@binder-world.com
www.binder-world.com

BINDER Asia Pacific (Hong Kong) Ltd.

Kowloon, Hong Kong, P.R. China
TEL +852 39070500
asia@binder-world.com
www.binder-world.com