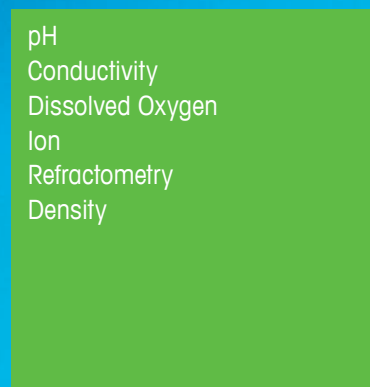




METTLER TOLEDO OnLine Analytical Instruments

METTLER TOLEDO

Meters

	Benchtop Meters	5-11
	FiveEasy™ and FiveEasy Plus™	5
	SevenCompact™ and SevenCompact™ Duo	7
	SevenExcellence™	9
	Portable Meters	12-22
	FiveGo™	12
	Seven2Go™ Routine	14
	SevenGo Duo™	16
	Seven2Go Pro™	18
	SevenGo Duo Pro™	20

Electrodes

	pH Electrodes	22-26
	General Applications	
	Electrodes for Fast Results	22
	Maintenance Free Electrodes	23
	Special Applications	
	Electrodes for Small Volumes	23
	Electrodes for Specific Applications	24
	Long Electrodes	24
	Special Technology	25
	pH Electrodes for Portable Meters	25
	pH Half-Cells and Reference Electrodes	25
	LE pH Electrodes	26
	ORP / Redox Electrodes	27
	InLab® ORP / Redox Electrodes	27
	LE ORP / Redox Electrodes	27
	Conductivity Probes	28
	Conductivity Probes for Bench Meters	28
	Conductivity Probes for Portable Meters	29
	LE Conductivity Probes	29
	Ion-Selective and Gas Sensitive Electrodes	30
	Ion-Selective and Gas Sensitive Electrodes (Half-Cells)	30
	Ion-Selective Electrodes (Combination)	31
	ISE Calibration Standards and ISA Solutions	32
	DO Sensors	33
	InLab® DO Sensors	33
	LE DO Sensors	33
	Temperature Probes	34
	Temperature Probes	34
	Sensor Accessories	35
	Sensor Accessories	35

Buffers and Solutions

	Buffers and Solutions	36-38
	Buffer Solutions	36
	Electrolytes	37
	Conductivity Standards	37
	Ion Standards	38
	Maintenance Solutions	38

Accessories

	Printers and Cables	39-41
	Printers	39
	Cables	41

Density and Refractometers

	Density and Refractometers	42-43
	Densito	42
	Refracto	43

Literature

	Literature	44-48
	Product Brochures	44
	Datasheets	45
	Flyers	47
	Posters	47
	Application Notes and Guides	48

Entry-level Benchtop Meters

FiveEasy™ and FiveEasy Plus™

Simplify your Lab

Measurement made easy

A large, well-structured display, intuitive button arrangement and simple menu ensure measurements can be performed in just a few clicks.

Compact design saves space

Through its compact design and the ability to remove the sensor holder and store it on the side of the meter, little bench space is needed.

Simple and secure data transfer

The FiveEasy Plus series meters allow data to be exported either directly to a printer or a PC for further processing using RS232 or USB ports.



FiveEasy™

Item No	Model	Description	Product Remarks
30266658	F20-Meter	pH Bench F20-Meter	pH instrument incl. operating manual, "Quick guide", power adapter, declaration of conformity and test certificate
30266626	F20-Standard	pH Bench F20-Standard	Same as F20 meter plus LE438 sensor, buffer sachets and guides
30312417	F20-Standard Bundle	pH Bench F20-Standard Bundle	Same as F20-Standard, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30266942	F30-Meter	Cond Bench F30-Meter	Conductivity instrument incl. operating manual, "Quick guide", power adapter, declaration of conformity and test certificate
30266943	F30-Standard	Cond Bench F30-Standard	Instrument and accessories as with F30-Meter, also with LE703 conductivity sensor, electrode arm, 1x 1413 µS/cm and 1x 12.88 mS/cm standard sachets

FiveEasy Plus™

Item No	Model	Description	Product Remarks
30266627	FP20-Meter	pH Bench FP20-Meter	pH instrument incl. operating manual, "Quick guide", power adapter, declaration of conformity and test certificate
30266628	FP20-Standard	pH Bench FP20-Standard	Same as FP20 meter plus LE438 sensor, buffer sachets and guides
30312419	FP20-Standard Bundle	pH Bench FP20-Standard Bundle	Same as FP20-Standard, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30266629	FP20-Bio	pH Bench FP20-Bio	Same as FP20 meter plus LE410 sensor, buffer sachets and guides
30312490	FP20-Bio Bundle	pH Bench FP20-Bio Bundle	Same as FP20-Bio, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30266940	FP20-Micro	pH Bench FP20-Micro	FiveEasy Plus instrument and accessories as with FP20-Meter, also with LE422 micro pH electrode, electrode arm, 1 x 4.01, 7.00 and 9.21 buffer sachets
30266941	FP20-TRIS	pH Bench FP20-TRIS	FiveEasy Plus instrument and accessories as with FP20-Meter, also with LE420 pH electrode, electrode arm, 1 x 4.01, 7.00 and 9.21 pH buffer sachets
30266944	FP30-Meter	Cond Bench FP30-Meter	Conductivity instrument incl. operating manual, "Quick guide", power adapter, declaration of conformity and test certificate
30266945	FP30-Standard	Cond Bench FP30-Standard	Instrument and accessories as with FP30-Meter, also with LE703 conductivity sensor, electrode arm 1x 1413 µS/cm and 1x 12.88 mS/cm standard sachets

Electrodes

Item No	Description
51340330	LE407 (plastic, gel electrolyte) pH electrode
51340347	LE408 (plastic, liquid electrolyte) pH electrode
51340331	LE409 (glass, liquid electrolyte) pH electrode
51340348	LE410 (glass, liquid electrolyte) pH electrode
51340332	LE420 (glass, sleeve diaphragm) pH electrode
30089747	LE422 (glass, gel electrolyte) pH electrode
51340333	LE427 (plastic, gel electrolyte) puncture pH electrode
51340334	LE427-S7 (plastic, gel electrolyte) puncture pH electrode with S7 connector (available until stock lasts)
51340242	LE438 (plastic, 3-in-1) pH electrode
51340338	LE501 (glass) Redox electrode
51340339	LE510 (plastic) Redox electrode
51340335	LE703 (4 pole, graphite) conductivity
51340336	LE740 (PVC/Stainless steel) conductivity

Accessories

Item No	Description
51343310	InLab® NTC30K Probe
51300164	ATC probe (NTC 30 kΩ)
30239146	FiveEasy Plus™ /FiveEasy™ cover for elec. arm
30239139	FiveEasy Plus™ /FiveEasy™ electrode arm (complete)
30239140	FiveEasy Plus™ /FiveEasy™ electrode arm extension bar
30323214	EasyDirect™ pH license key
51191926	USB cable, 1.8 m
11124300	Printer RS-P25
11124303	Printer RS-P26
11124304	Printer RS-P28
11120270	Adapter AC/DC JB

Routine Benchtop Meters

SevenCompact™ and SevenCompact™ Duo

Versatile and universal

Truly intuitive operation

Starting a measurement or calibration requires only a single keypress. Menu settings are intuitive, consisting of full sentences in 10 languages.

High-resolution colour display

The 4.3-inch colour display with its large digits and well-arranged icons makes the relevant data identifiable at a glance.

All-round productivity from the start

The robust and reliable InLab® sensors are designed for the measurement of samples with the most diverse properties.



SevenCompact™

Item No	Model	Description	Product Remarks
30130862	S210-BASIC	pH bench meter SC S210-B	Includes instrument, electrode holder, protective cover, operating instructions, quick guide, declaration of conformity and test certificate
30130863	S210-KIT	pH bench meter SC S210-K	As S210-BASIC, but also with InLab® Expert Pro-ISM, guide to pH measurements and 2 buffer sachets for pH 4.01, 7.00, 9.21 and 10.00
30255072	S210-KIT Bundle	pH bench meter SC S210-K Bundle	As S210-KIT, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30130864	S210-BIO	pH bench meter SC S210-Bio	As S210-KIT but with InLab® Routine Pro-ISM cable kit instead of InLab® Expert Pro-ISM
30255074	S210-BIO Bundle	pH bench meter SC S210-Bio bundle	As S210-BIO, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30130865	S210-U	pH bench meter SC S210-Uni	As S210-KIT but with InLab® Versatile Pro instead of InLab® Expert Pro-ISM
30019028	S220-BASIC	pH/ion bench meter SC S220-B	Includes instrument, electrode holder, protective cover, operating instructions, quick guide, declaration of conformity and test certificate
30019029	S220-KIT	pH/ion bench meter SC S220-K	As S220-BASIC, but also with InLab® Expert Pro-ISM, guide to pH measurements and 2 buffer sachets for pH 4.01, 7.00, 9.21 and 10.00
30255073	S220-KIT Bundle	pH/ion bench meter SC S220-K	As S220-KIT, but also with two 250ml buffer bottles for pH 4.01, 7.00 and 9.21
30096986	S220-uMIX	pH/ion bench meter SC S220-uMix	SevenCompact™ pH/ion BASIC S220-uMIX™ kit with InLab® Expert Pro-ISM and uMix™ magnetic stirrer
30019031	S220-BIO	pH/ion bench meter SC S220-Bio	As S220-KIT but with InLab® Routine Pro-ISM cable kit instead of InLab® Expert Pro-ISM
30255075	S220-BIO bundle	pH/ion bench meter SC S220-Bio bundle	As S220-BIO, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30096985	S220-MICRO	pH/ion bench meter SC S220-Micro	SevenCompact™ pH/ion BASIC S220-MICRO kit with InLab® Ultra-Micro-ISM and MultiPin-BNC/RCA cable (1.2 m)
30019032	S220-U	pH/ion bench meter SC S220-Uni	As S220-KIT but with InLab® Versatile Pro instead of InLab® Expert Pro-ISM
30019033	S230-BASIC	Cond bench meter SC S230-B	Includes instrument, electrode holder, protective cover, operating instructions, quick guide, declaration of conformity and test certificate
30019034	S230-KIT	Cond bench meter SC S230-K	As S230-BASIC, but also with InLab® 731-ISM, guide to conductivity and dissolved oxygen, and 2 calibration sachets for 1413 µS/cm and 12.88 mS/cm
30019035	S230-USP/EP	Cond bench meter SC S230-USP/EP	As S230-KIT but with InLab® 741-ISM instead of InLab® 731-ISM, and without 12.88 mS/cm calibration sachets

SevenCompact™ Duo

Item No	Model	Description	Product Remarks
30339958	S213-BASIC	SevenCompact Duo™ S213 pH/cond. meter only	Includes instrument, electrode holder, protective cover, operating instructions, user manual, declaration of conformity, and test certificate
30339959	S213-KIT	SevenCompact Duo™ S213 pH/cond. Standard kit	As 213-BASIC, but with InLab Expert Pro-ISM pH Sensor and InLab 731 conductivity Sensor, guide to pH measurement and conductivity measurement, 2 buffer sachets for pH 4.01, 7.00, 9.21 and 10.00 and 2 standard sachets for 1413 µS/cm and 12.88 mS/cm
30339980	S213-Water	SevenCompact Duo™ S213 pH/cond. Water kit	S213-Water kit comes with an InLab Pure Pro-ISM for pH and a InLab 741-ISM for conductivity measurements. Also included are 2 buffer sachets for pH 4.01, 7.00, 9.21 and 10.00 so as 2 conductivity standard sachets for 1413 µS/cm and 12.88 mS/cm

Electrodes

Item No	Description
30014096	InLab® Expert Pro-ISM
51344055	InLab® Routine Pro-ISM
51343031	InLab® Versatile Pro
30244732	InLab® Ultra-Micro-ISM
30014092	InLab® 731-ISM
30014094	InLab® 741-ISM

Accessories

Item No	Description
51300164	ATC probe (NTC 30 kΩ)
30027776	Cable InLab® Digital K8SD to Mini-LTW, 1.2 m
30014098	Flow-Cell for InLab® Trace
30019823	uPlace™ electrode holder (included in standard delivery)
30323214	EasyDirect™ pH license key
30019824	Protective cover (included in standard delivery)
51191926	USB Cable (1.8 m A-B) for PC or printer
11124300	Printer RS-P25
11124303	Printer RS-P26
11124304	Printer RS-P28
11124301	USB-P25 printer (with USB cable)
30094673	P-56RUE (only R232, not USB)
30094674	P-58RUE (only R232, not USB)
30115728	Compact Stirrer Kit
30098212	Compact Stirrer adapter cable
11120270	Adapter AC/DC JB
21901297	Barcode Reader Hand Scanner
21901309	USB Cable 412
51191926	USB Cable (1.8 m A-B) for PC or printer
30040000	Magnetic stirrer uMix

Premium Benchtop Meters

SevenExcellence™

Unmatched lab performance

Professional and flexible

In addition to pH and ORP, ISFET is also supported. Further flexibility thanks to the method concept and numerous measurement and calibration options.

Professional pH calibration

Extra security with calibrations owing to methods with strict user guidance and monitoring of offset and slope.

Efficient workflow support

The complete cycle from data entry via sample analysis to data archiving is efficient and intuitive.



Item No	Model	Description	Product Remarks
30046240	S400-METER	pH bench meter SE S400-B	Includes instrument, pH/mV expansion unit, 2 blank expansion units, uPlace™ electrode holder, semi-transparent cover, operating instructions, installation and quick guide, EasyDirect™ pH, declaration of conformity and test certificate
30046241	S400-KIT	pH bench meter SE S400-K	As S400-METER, but also with InLab® Expert Pro-ISM, guide to pH measurements and 2 buffer sachets for pH 4.01, 7.00, 9.21 and 10.00
30046242	S400-BIO	pH bench meter SE S400-Bio	As S400-KIT but with InLab® Routine Pro-ISM cable kit instead of InLab® Expert Pro-ISM
30092982	S400-MICRO	pH bench meter SE S400-Micro	As S400-KIT but with InLab® Ultra-Micro-ISM instead of InLab® Expert Pro-ISM
30092983	S400-uMIX	pH bench meter SE S400-uMix	As S400-KIT, also including magnetic stirrer uMix™
30046248	S500-METER	pH/ion bench meter SE S500-B	Includes instrument, pH/ion expansion unit, 2 blank expansion units, uPlace™ electrode holder, semi-transparent cover, operating instructions, installation and quick guide, EasyDirect™ pH, declaration of conformity and test certificate
30046249	S500-KIT	pH/ion bench meter SE S500-K	As S500-METER, but also with InLab® Expert Pro-ISM, guide to pH measurements and 2 buffer sachets for pH 4.01, 7.00, 9.21 and 10.00
30046250	S500-BIO	pH/ion bench meter SE S500-Bio	As S500-KIT but with InLab® Routine Pro-ISM cable kit instead of InLab® Expert Pro-ISM
30046251	S500-F	pH/ion bench meter SE S500-F	As S500-KIT but with PerfectION™ Fluoride instead of InLab® Expert Pro-ISM
30092985	S600-KIT	DO bench meter SE S600-Kit	As S900-KIT, but with InLab® 605-ISM instead of InLab® OptiOx
30046244	S700-METER	Cond bench meter SE S700-B	Includes instrument, conductivity expansion unit, 2 blank expansion units, uPlace™ electrode holder, semi-transparent cover, operating instructions, installation and quick guide, EasyDirect™ pH, declaration of conformity and test certificate
30046245	S700-KIT	Cond bench meter SE S700-K	As S700-METER, but also with InLab® 731-ISM, guide to conductivity measurements and 2 calibration sachets for 1413 µS/cm and 12.88 mS/cm
30046246	S700-TRACE	Cond bench meter SE S700-Trace	As S700-KIT but with InLab® Trace instead of InLab® 731-ISM, with Flow-Cell and without calibration sachets
30092984	S900-METER	DO bench meter SE S900-Basic	Includes instrument, DO/BOD expansion unit, 2 blank expansion units, uPlace™ electrode holder, semi-transparent cover, operating instructions, installation and quick guide, EasyDirect™ pH, declaration of conformity and test certificate
30092986	S900-KIT	DO bench meter SE S900-Kit	As S900-METER but with InLab® OptiOx, guide to do measurement and zero oxygen tablets
30092987	S900-BOD	DO bench meter SE S900-BOD	As S900-KIT, also including BOD adapter

Item No	Model	Description	Product Remarks
30046252	S470-METER	pH/Cond bench meter SE S470-B	As S700-METER, but with a pH/mV expansion unit instead of a blank expansion unit
30046253	S470-KIT	pH/Cond bench meter SE S470-K	As S700-KIT, but with but with a pH/mV expansion unit instead of a blank expansion unit. Additionally with InLab® Expert Pro-ISM, guide to pH measurements and 2 buffer sachets for pH 4.01, 7.00, 9.21 and 10.00
30046254	S470-USP/EP	pH/Cond meter SE S470-USP/EP	As S470-KIT but with InLab® 741-ISM instead of InLab® 731-ISM and InLab® Pure Pro-ISM instead of InLab® Expert Pro-ISM, BNC/RCA-MultiPin™ISM-cable (1,2 m), and without 1413 µS/cm and 12.88 mS/cm calibration sachets
30046255	S475-METER	pH/Ion/Cond bench meter SE S475-B	Includes instrument, pH/Ion expansion unit, pH/mV expansion unit, conductivity expansion unit, uPlace™ electrode holder, semi-transparent cover, operating instructions, installation and quick guide, EasyDirect™ pH, declaration of conformity and test certificate
30092988	S479-KIT	pH/Cond/DO meter SE S479-Kit	Includes instrument, pH/mV, conductivity and DO/BOD expansion units, uPlace™ electrode holder, semi-transparent cover, operating instructions, installation and quick guide, EasyDirect™ pH, declaration of conformity and test certificate. Included kit sensors: InLab® Expert Pro-ISM, InLab® 731-ISM and InLab® OptiOx
30092989	S975-uMIX	pH/Ion/Cond/DO meter SE S975-uMix	Includes instrument, pH/Ion, DO/BOD and conductivity expansion units, uPlace™ electrode holder, semi-transparent cover, operating instructions, installation and quick guide, EasyDirect™ pH, declaration of conformity and test certificate. Also includes the uMix™ magnetic stirrer Kit includes the following sensors: InLab® Expert Pro-ISM, InLab® 731-ISM and InLab® OptiOx

Electrodes

Item No	Description
30014096	InLab® Expert Pro-ISM
51344055	InLab® Routine Pro-ISM
30244732	InLab® Ultra-Micro-ISM
51344172	InLab® Pure Pro-ISM
30014092	InLab® 731-ISM
30014094	InLab® 741-ISM
30014097	InLab® Trace
51344715	perfect ION™ Fluoride
51344611	InLab® 605-ISM
51344621	InLab® OptiOx

Accessories

Item No	Description
30034471	SevenExcellence™ pH/Ion expansion unit
30034472	SevenExcellence™ pH/mV expansion unit
30034473	SevenExcellence™ conductivity expansion unit
30034474	SevenExcellence™ DO/BOD expansion unit
30034475	SevenExcellence™ blank expansion unit
11124301	USB-P25 printer (with USB cable)
21901309	USB Cable 412
51191926	USB A-B cable (1.8 m A-B)
30027776	Cable InLab® Digital K8SD to Mini-LTW, 1.2 m
30014098	Flow-Cell for InLab® Trace
30323214	EasyDirect™ pH license key
30040000	uMix™ magnetic stirrer
30041154	Semi-transparent cover (included in standard delivery)
30041155	Protective film for display (2 pcs)
30019823	uPlace™: electrode holder (included in standard delivery)
30115728	Compact Stirrer Kit
30098212	Compact Stirrer adapter cable
21901297	Barcode Reader Hand Scanner
21901309	USB Cable 412
30094673	P-56RUE
30094674	P-58RUE
11124300	RS-P25
11124301	USB-P25
11124303	RS-P26
11124304	RS-P28/11
11120270	Adapter AC/DC JB
51192107	LogStraight fingerprint

Entry-level Portable Meters

FiveGo™

Simplify your Mobile Lab

Measurement made easy

A large, well-structured display, intuitive button arrangement and simple menu ensure measurements can be performed in just a few clicks.

Ergonomic design for one handed operation

Thanks to its ergonomic design, handling the FiveGo™ is a comfortable experience. The foldable stand provides optimal viewing on flat surfaces.

IP67 Water and dustproof

The IP67 waterproof protection makes the FiveGo™ portables able to withstand wet and demanding environments.



Item No	Model	Description	Product Remarks
30266946	F2-Meter	pH Portable F2-Meter	pH instrument incl. electrode clip, wrist strap, operating manual, Quick guide*, 4 x batteries, declaration of conformity and test certificate
30266889	F2-Standard Kit	pH Portable F2-Standard Kit	Same as F2 meter plus LE438 IP67 sensor, buffer sachets and guides
30312492	F2-Standard Bundle	pH Portable F2-Standard Bundle	As F2-Standard, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30266881	F2-Food Kit	pH Portable F2-Food Kit	Same as F2 meter plus LE427 IP67 sensor, buffer sachets and guides
30312494	F2-Food Bundle	pH Portable F2-Food Bundle	As F2-Food, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30266882	F2-Field Kit	pH Portable F2-Field Kit	Same as F2 meter plus LE438 IP67 sensor, carry case, 4 sample bottles, buffer sachets and guides
30312493	F2-Field Bundle	pH Portable F2-Field Bundle	As F2-Field, but also with two 250 ml buffer bottles for pH 4.01, 7.00 and 9.21
30266883	F3-Meter	Cond Portable F3-Meter	Conductivity instrument incl. electrode clip, wrist strap, operating manual, "Quick guide", 4 x batteries, declaration of conformity and test certificate
30266888	F3-Standard Kit	Cond Portable F3-Standard Kit	Instrument and accessories as with F3-Meter, with LE703 conductivity sensor, IP67 connection caps, 1x 1413 µS/cm and 1x 12.88 mS/cm standard sachets
30266887	F3-Field Kit	Cond Portable F3-Field Kit	Instrument and accessories as for F3-Standard, with carry carrying case incl. 4 sample bottles
30266884	F4-Meter	DO Portable F4-Meter	Dissolved oxygen meter incl. electrode clip, wrist strap, operating manual, "Quick guide", 4 x batteries, declaration of conformity and test certificate
30266885	F4-Standard Kit	DO Portable F4-Standard Kit	Instrument and accessories as for F4-Meter, but with LE621 sensor, NTC 30 kΩ temperature sensor, IP67 connection caps
30266886	F4-Field Kit	DO Portable F4-Field Kit	Instrument and accessories as for F4-Standard, with carrying case incl. 4 sample bottles

Electrodes

Item No	Description
51340330	LE407 (plastic, gel electrolyte) pH electrode
51340347	LE408 (plastic, liquid electrolyte) pH electrode
51340331	LE409 (glass, liquid electrolyte) pH electrode
51340332	LE420 (glass, sleeve diaphragm) pH electrode
51340333	LE427 (plastic, gel electrolyte) puncture pH electrode
51340334	LE427-S7 (plastic, gel electrolyte) puncture pH electrode with S7 connector (available until stock lasts)
51340242	LE438 (plastic, 3-in-1) pH electrode
51340338	LE501 (glass) Redox electrode
51340339	LE510 (plastic) Redox electrode
51340401	LE611 Galvanic DO sensor with 1.1 m cable (available until stock lasts)
51340402	LE612 Galvanic DO sensor with 5 m cable (available until stock lasts)
51340403	LE621 Galvanic DO sensor with 1.1 m cable and integrated temperature probe
51340404	LE622 Galvanic DO sensor with 5 m cable and integrated temperature probe (available until stock lasts)
30247153	LE438 pH Sensor IP67 2 m cable
30259840	LE427 pH Sensor IP67 2 m cable
30266974	LE703 Conductivity Sensor IP67 2 m cable
30266975	LE621 Dissolved Oxygen Sensor IP67 2 m cable

Accessories

Item No	Description
51300164	ATC probe (NTC 30 k Ω)
30122304	Wrist strap
30239142	FiveGo™ carrying case
30239143	FiveGo™ sample bottles (4 pcs)
30239144	FiveGo™ electrode clip & clip covers
51302329	LTW-MiniDin adapter (LE703, LE740)

Routine Portable Meters

Seven2Go™ Routine

Everywhere you Measure pH

Fast quality data on the go

Seven2Go's simplified menu, automatic sensor recognition, and calibration reminder ensure users obtain high quality data fast.

Comfortable One-Handed Operation

Seven2Go's easy-to-reach, hardkey buttons and sleek design ensure comfortable one-handed operation even under wet conditions and prolonged use.

Rugged investment that lasts

Seven2Go's IP67 design, reduced weight, and rugged uGo™ carrying case ensure a lasting instrument providing reliable data even under harsh conditions.



Item No	Model	Description	Product Remarks
30207949	S2-Meter	pH portable S2-Meter	Includes S2 pH/mV instrument, electrode clip, operating instructions, quick guide, test report, declaration of conformity and batteries, rubber holster
30207950	S2-Standard kit	pH portable S2-Standard Kit	Instruments and accessories as with S2-Meter, plus InLab® Expert Go-ISM and buffer sachets for pH 4.01, 7.00, 9.21 and 10.00, rubber holster
30207951	S2-Field kit	pH portable S2-Field Kit	Instruments and accessories as with S2-Meter, plus InLab® Expert Go-ISM and buffer sachets for pH 4.01, 7.00, 9.21, 10.00, plus bottles for calibration and the uGo™ carrying case, rubber holster
30207952	S2-Food kit	pH portable S2-Food Kit	Instruments and accessories as with S2-Meter, plus InLab® Solid Go-ISM, buffer sachets for pH 4.01, 7.00, 9.21, and 10.00, plus bottles for calibration and the uGo™ carrying case, rubber holster
30207953	S2-Light kit	pH portable S2-Light Kit	Instruments and accessories as with S2-Meter, plus InLab® Versatile Pro and v for pH 4.01, 7.00 and 9.21 pH buffer sachets, rubber holster
30207954	S3-Meter	Cond portable S3-Meter	Includes the S3 conductivity instrument, electrode clip, operating instructions, quick guide, test report, declaration of conformity and batteries, rubber holster
30207955	S3-Standard kit	Cond portable S3-Standard Kit	Instruments and accessories as with the S3-Meter, plus InLab® 738-ISM and sachets of conductivity standards 1413 µS/cm and 12.88 mS/cm, rubber holster
30207956	S3-Field kit	Cond portable S3-Field Kit	Instrument and accessories as with the S3-Meter, plus InLab® 738-ISM, sachets of conductivity standards 1413 µS/cm and 12.88 mS/cm, plus bottles for calibration and uGo™ carrying case, rubber holster
30207957	S3-Bioethanol kit	Cond portable S3-Bioethanol Kit	Instrument and accessories as with the S3-Meter, plus InLab® 725, sachets of low conductivity standards 84 µS/cm, plus bottles for calibration and uGo™ carrying case, rubber holster
30207958	S4-Meter	DO portable S4-Meter	Includes the S4 DO instrument, electrode clip, operating instructions, quick guide, test report, declaration of conformity and batteries, rubber holster
30207959	S4-Standard kit	DO portable S4-Standard Kit	Instrument and accessories as with the S4-Meter, plus InLab® 605-ISM, and zero oxygen tablets for calibration, rubber holster
30207960	S4-Field kit	DO portable S4-Field Kit	Instrument and accessories as with the S4-Meter, plus InLab® 605-ISM, zero oxygen tablets for calibration, and uGo™ carrying case, rubber holster

Electrodes

Item No	Description
51344102	InLab® Expert Go-ISM
51344103	InLab® Expert Go-5m-ISM
51344104	InLab® Expert Go-10m-ISM
51343156	InLab® Solids Go-ISM
51343031	InLab® Versatile Pro
51344110	InLab® 738-ISM
51344112	InLab® 738-ISM-5m
51344114	InLab® 738-ISM-10m
30014160	InLab® 725
51344611	InLab® 605-ISM
51344612	InLab® 605-ISM-5m
51344613	InLab® 605-ISM-10m

Accessories

Item No	Description
51343310	InLab® NTC30K Probe
51302329	LTW-MiniDin adapter (to connect InLab® 710/720/731/741/751/752)
30122313	Seven2Go™ manual on CD-ROM
30122291	Rubber holster to protect your Seven2Go™ instrument. Fits into the the carrying case uGo. Needs to be removed to exchange the batteries.
30122300	uGo™ carrying case
30122303	Seven2Go™ meter base accessory for extra stability on flat surfaces
30137805	Seven2Go™ electrode clip and electrode clip covers (4 pieces)
30122304	Seven2Go™ wrist strap
30137807	Seven2Go™ micro-USB to standard-A USB cable for optional power supply or PC connectivity (Pro meters only)
30137803	Seven2Go™ bottom cap(blue)
30137806	Seven2Go™ DC wallplug adapter for USB cable for optional DC power supply (Pro meters only)
30019823	Electrode holder uPlace

SevenGo Duo™ (Dual-Channel)

Dual Measurements Anywhere

Intuitive and Easy Operation

Designed in such a way that a single keystroke triggers a calibration run, measurement or review of stored data.

Intelligent Sensor Management (ISM®)

ISM® leaves nothing to chance! Calibration data and history are stored in the sensor and transferred automatically upon connection to the meter.

Ergonomic Masterpiece

Fits your hand perfectly, regardless of whether you are right- or left-handed. Your thumb can reach all buttons – easy to operate.



Item No	Model	Description	Product Remarks
51302600	SG23-METER	SevenGo Duo™ pH/conductivity meter only	Dual-channel pH/conductivity meter (no electrode) with BNC and LTW fittings, complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster
51302601	SG23-KIT	SevenGo Duo™ pH/conductivity kit	Dual-channel pH/conductivity meter with InLab® Expert-Go-ISM and InLab® 738-ISM (both IP67, 1.8 m fixed cable), complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster
51302602	SG23-FIELD-KIT2	SevenGo Duo™ pH/conductivity (1.8 m) field kit	Dual-channel pH/conductivity meter with InLab® Expert-Go-ISM and InLab® 738-ISM (both IP67, 1.8 m cable), with uGo™ carrying case, rubber holster, 2 SevenGo™ clips, buffer sachets pH (2 each: 4.00, 7.00, 9.21), conductivity standard sachets (2 each: 1413 µS/cm, 12.88 mS/cm), calibration bottles, and same accessories as SG23-KIT
51302603	SG23-FIELD-KIT5	SevenGo Duo™ pH/conductivity (5 m) field kit	Dual-channel pH/conductivity meter with InLab® Expert-Go-ISM-5m and InLab® 738-ISM-5m (both IP67, 5 m cable), with uGo™ carrying case, rubber holster, 2 SevenGo™ clips, buffer sachets pH (2 each: 4.00, 7.00, 9.21), conductivity standard sachets (2 each: 1413 µS/cm, 12.88 mS/cm), calibration bottles, and same accessories as SG23-KIT

Electrodes

Item No	Description
51344102	InLab® Expert Go-ISM
51344103	InLab® Expert Go-5m-ISM
51344104	InLab® Expert Go-10m-ISM
51344110	InLab® 738-ISM
51344112	InLab® 738-ISM-5m
51344114	InLab® 738-ISM-10m

Accessories

Item No	Description
51343310	InLab® NTC30K Probe
51302319	SevenGo™ two-electrode clip
51302322	SevenGo™ rubber holster
51302324	Bottom cap (blue)
51302325	SevenGo™ clip
51302327	Clip cover
51302328	Battery cover
51302329	LTW-MiniDin adapter (to connect InLab® 710/720/731/741/751/752)
51302335	Rubber feet (2 pieces)
51302336	SevenGo™ sealing kit (sealings for battery case, BNC plug, Cinch plug and screw holes)
30122300	uGo™ carrying case
51302329	LTW-MiniDin adapter
51302333	IR-RS232 Adapter
51302331	SevenGo™ wrist strap

Premium Portable Meters

Seven2Go Pro™

Mobile Quality Measurement

Fast quality data on the go

Seven2Go Pro's simplified menus, LED Status Light and uFocus™ measurement screen provide mobile users with fast, high quality data.

Comfortable One-Handed Operation

Seven2Go's easy-to-reach, hardkey buttons and sleek design ensure comfortable one-handed operation even under wet conditions and prolonged use.

Rugged investment that lasts

Seven2Go Pro's IP67 design, sunlight-proof screen, and optimized battery consumption ensure reliable data even under harsh conditions.



Item No	Model	Description	Product Remarks
30207961	S7-Meter	Cond portable S7-Meter	Includes the S7 conductivity instrument, EasyDirect™ pH, instructions, quick guide, test report, declaration of conformity and batteries, rubber holster
30207962	S7-Standard kit	Cond portable S7-Standard Kit	Instruments and accessories as with the S7-Meter, plus InLab® 738-ISM, sachets of conductivity standard 1413 µS/cm and 12,88 mS/cm, rubber holster
30207963	S7-Field kit	Cond portable S7-Field Kit	Instruments and accessories as with the S7-Meter, plus InLab® 738-ISM, sachets of conductivity standard 1413 µS/cm and 12,88 mS/cm, plus bottles for calibration and uGo™ carrying case, rubber holster
30207873	S7-USP/EP kit	Cond portable S7-USP/EP Kit	Instrument and accessories as with the S7-Meter, plus InLab® 742-ISM, sachets of conductivity standard 84 µS/cm, plus bottles for calibration and uGo™ carrying case, rubber holster
30207874	S8-Meter	pH/Ion portable S8-Meter	Includes S8 pH/Ion instrument, EasyDirect™ pH, USB cable, electrode clip, base accessory, operating instructions, quick guide, test report, declaration of conformity and batteries, rubber holster
30207875	S8-Standard kit	pH/Ion portable S8-Standard Kit	Instrument and accessories as with the S8-Meter, plus InLab® Expert Go-ISM and buffer sachets for pH 4.01, 7.00, 9.21 and 10.00, rubber holster
30207877	S8-Field kit	pH/Ion portable S8-Field Kit	Instruments and accessories as with the S8-Meter, plus InLab® Expert Go-ISM and buffer sachets for pH 4.01, 7.00, 9.21, 10.00 and bottles for calibration and uGo™ carrying case, rubber holster
30207878	S8-Biotech kit	pH/Ion portable S8-Biotech Kit	Instruments and accessories as with the S8-Meter, plus InLab® Routine Go-ISM (incl. cable) and buffer sachets for pH 4.01, 7.00, 9.21, 10.00 and bottles for calibration and uGo™ carrying case, rubber holster
30207879	S8-Fluoride kit	pH/Ion portable S8-Fluoride Kit	Instrument and accessories as with the S8-Meter, plus perfectION™ FI- sensor, bottles for calibration and uGo™ carrying case, rubber holster
30207970	S9-Meter	DO portable S9-Meter	Includes the S9 DO instrument, EasyDirect™ pH, USB cable, electrode clip, base accessory, operating instructions, quick guide, test report, declaration of conformity and batteries, rubber holster
30207971	S9-Standard kit	DO portable S9-Standard Kit	Instrument and accessories as with the S9-Meter, plus InLab® OptiOx sensor (IP67) and zero oxygen tablets for calibration, rubber holster
30207972	S9-Field kit	DO portable S9-Field Kit	Instrument and accessories as with the S9-Meter, plus InLab® OptiOx sensor (IP67), zero oxygen tablets and bottles for calibration, the uGo™ carrying case and InLab® OptiOx protective guard for added sensor-protection, rubber holster
30207939	S9-BOD kit	DO portable S9-BOD Kit	Instrument and accessories as with the S9-Meter, plus InLab® OptiOx sensor (IP67), zero oxygen tablets and bottles for calibration, the uGo™ carrying case and InLab® OptiOx BOD adapter, rubber holster

Electrodes

Item No	Description
51344102	InLab® Expert Go-ISM
51344103	InLab® Expert Go-5m-ISM
51344104	InLab® Expert Go-10m-ISM
30248832	InLab® Routine Go-ISM
51344110	InLab® 738-ISM
51344112	InLab® 738-ISM-5m
51344116	InLab® 742 ISM
51344118	InLab® 742 ISM-5m
51344114	InLab® 738-ISM-10m
51344715	perfectION™ Fluoride
51344621	InLab® OptiOx
51344622	InLab® OptiOx 5 m
51344623	InLab® OptiOx 10 m

Accessories

Item No	Description
51343310	InLab® NTC30K Probe
51302329	LTW-MiniDin adapter (to connect InLab® 710/720/731/741/751/752)
51344630	RDO replacement cap for InLab®OptiOx
51344631	Calibration tube for InLab®OptiOx
51344632	Stainless steel protection guard and sensor sinker for InLab®OptiOx
51344633	BOD adapter for InLab®OptiOx
30323214	EasyDirect™ pH software license key
30122291	Rubber holster to protect your Seven2Go™ instrument. Fits into the the carrying case uGo. Needs to be removed to exchange the batteries.
30122300	uGo™ carrying case
30122303	Seven2Go™ meter base accessory for extra stability on flat surfaces
30137805	Seven2Go™ electrode clip and electrode clip covers (4 pieces)
30122304	Seven2Go™ wrist strap
30137807	Seven2Go™ micro-USB to standard-A USB cable for optional power supply or PC connectivity (Pro meters only)
30137806	Seven2Go™ DC wallplug adapter for USB cable for optional DC power supply (Pro meters only)
30137803	Seven2Go™ bottom cap(blue)
30019823	Electrode holder uPlace
51302329	LTW-MiniDin adapter

SevenGo Duo Pro™ (Dual-Channel)

Dual Measurements Anywhere

Intuitive Menu-Guidance in 10 Languages

Operation is extremely user-friendly thanks to flexible softkeys and large backlit display. In addition, the instruments relay full sentences in 10 languages.

Intelligent Sensor Management (ISM®)

ISM® leaves nothing to chance! Calibration data and history are stored in the sensor and transferred automatically upon connection to the meter.

Ergonomic Masterpiece

Fits your hand perfectly, regardless of whether you are right- or left-handed. Your thumb can reach all buttons – easy to operate.



Item No	Model	Description	Product Remarks
51302610	SG68-METER	SevenGo Duo Pro™ pH/Ion/DO meter only	Dual-channel pH/ion/dissolved oxygen meter (no electrode) with BNC fittings, complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster
51302611	SG68-KIT	SevenGo Duo Pro™ pH/Ion/DO kit	Dual-channel pH/ion/dissolved oxygen meter with InLab® Expert-Go-ISM and InLab® 605-ISM (both IP67 and 1,8 m fixed cable) complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster
51302612	SG68-FIELD-KIT2	SevenGo Duo Pro™ pH/Ion/DO (2m) field kit	Dual-channel pH/ion/dissolved oxygen meter with InLab® Expert-Go-ISM and InLab® 605-ISM (both IP67, 1,8 m cable), with uGo™ carrying case, rubber holster, 2 SevenGo™ clips, buffer sachets pH (2 each: 4.00, 7.00), calibration bottles, and same accessories as SG68-KIT
51302613	SG68-FIELD-KIT5	SevenGo Duo Pro™ pH/Ion/DO (5m) field kit	Dual-channel pH/ion/dissolved oxygen meter with InLab® Expert-Go-ISM-5m and InLab® 605-ISM-5m (both IP67, 5 m cable), with uGo™ carrying case, rubber holster, 2 SevenGo™ clips, buffer sachets pH (2 each: 4.00, 7.00), calibration bottles, and same accessories as SG68-KIT
51302620	SG78-METER	SevenGo Duo Pro™ pH/Ion/conductivity meter only	Dual-channel pH/ion/conductivity meter (no electrode) with BNC and LTW fittings, complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster
51302621	SG78-KIT	SevenGo Duo Pro™ pH/Ion/conductivity kit	Dual channel pH/ion/conductivity meter with InLab® Expert-Go-ISM and InLab® 738-ISM (both IP67 and 1,8 m fixed cable) complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster
51302622	SG78-FIELD-KIT2	SevenGo Duo Pro™ pH/Ion/conductivity (2m) field kit	Dual-channel pH/ion/conductivity meter with InLab® Expert-Go-ISM and InLab® 738-ISM (both IP67, 1,8 m cable), with uGo™ carrying case, rubber holster, 2 SevenGo™ clips, buffer sachets pH (2 each: 4.00, 7.00), conductivity standard sachets (2 each; 1413 µS/cm and 12,88 µS/cm)
51302623	SG78-FIELD-KIT5	SevenGo Duo Pro™ pH/Ion/conductivity (5m) field kit	Dual-channel pH/ion/conductivity meter with InLab® Expert-Go-ISM-5m and InLab® 738-ISM-5m (both IP67, 5 m cable), with uGo™ carrying case, rubber holster, 2 SevenGo™ clips, buffer sachets pH (2 each: 4.00, 7.00), conductivity standard sachets (2 each; 1413 µS/cm, 12,88 µS/cm)
51302625	SG78-USP/EP	SevenGo Duo Pro™ pH/Ion/conductivity USP/EP kit	Dual-channel pH/ion/conductivity meter with InLab® Pure Pro-ISM and InLab® 742-ISM (IP67 and 1,8 m cable), with ISM MultiPin™ cable and same accessories as SG78-KIT, rubber holster
51302661	SG98-METER	SevenGo Duo Pro™ pH/Ion/RDO meter only	Dual-channel pH/ion/RDO meter (no electrode) with BNC and small LTW fittings, complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster
51302662	SG98-KIT	SevenGo Duo Pro™ pH/Ion/RDO kit	Dual-channel pH/ion/RDO meter with InLab® Expert-Go-ISM and InLab® OptiOx (both IP67 and 1,8 m fixed cable) complete with batteries, wrist strap, operating instructions, test certificate and declaration of conformity, rubber holster

Item No	Model	Description	Product Remarks
51302663	SG98-FIELD-KIT2	SevenGo Duo Pro™ pH/Ion/RDO (2m) field kit	Dual-channel pH/ion/RDO meter with InLab® Expert-Go-ISM and InLab®OptiOx (both IP67, 1,8 m cable), with uGo™ carrying case, rubber holster, buffer sachets pH (2 each: 4.00, 7.00), calibration bottles, and same accessories as SG98-KIT
51302664	SG98-FIELD-KIT5	SevenGo Duo Pro™ pH/Ion/RDO (5m) field kit	Dual-channel pH/ion/RDO meter with InLab® Expert-Go-ISM and InLab®OptiOx (both IP67, 5 m cable), with uGo™ carrying case, rubber holster, buffer sachets pH (2 each: 4.00, 7.00), calibration bottles, and same accessories as SG98-KIT

Electrodes

Item No	Description
51344102	InLab® Expert Go-ISM
51344103	InLab® Expert Go-5m-ISM
51344104	InLab® Expert Go-10m-ISM
51344172	InLab® Pure Pro-ISM
51344110	InLab® 738-ISM
51344112	InLab® 738-ISM-5m
51344114	InLab® 738-ISM-10m
51344116	InLab® 742 ISM
51344118	InLab® 742 ISM-5m
51344611	InLab® 605-ISM
51344612	InLab® 605-ISM-5m
51344613	InLab® 605-ISM-10m
51344621	InLab® OptiOx
51344622	InLab® OptiOx 5 m
51344623	InLab® OptiOx 10 m

Accessories

Item No	Description
51343310	InLab® NTC30K Probe
51302319	SevenGo™ two-electrode clip
51344630	RDO replacement cap for InLab®OptiOx
51302322	SevenGo™ rubber holster
51302324	Bottom cap (blue)
51302325	SevenGo™ clip
51302327	Clip cover
51344631	Calibration tube for InLab®OptiOx
51344632	Stainless steel protection guard and sensor sinker for InLab®OptiOx
51344633	BOD adapter for InLab®OptiOx
30122300	uGo™ carrying case
51302335	Rubber feet (2 pieces)
51302336	SevenGo sealing kit
11124303	RS-P26
11124304	RS-P28/11
51302333	IR-RS232 Adapter
51302329	LTW-MiniDin adapter (InLab 710/720/731/741/751/752)

pH Electrodes

Reliable solutions for the number 1 problem in pH measurements

The importance of measuring pH is reflected in the outstanding range of products available from METTLER TOLEDO. We offer you the full range of components necessary for a custom-made pH measuring system – everything from pH meters, the right sensors and cables to buffers and cleaning solutions.

www.electrodes.net/en/dealer



General Applications

Electrodes for Fast Results

Item No	Description	Product Remarks
51343050	InLab® Routine	For general application, pH 0...14, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343054	InLab® Routine Pro	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
51343056	InLab® Routine Pt1000	For general application, pH 0...14, temp. 0...100°C, integrated Pt1000 temperature probe, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
51344055	InLab® Routine Pro-ISM	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe and ISM, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
30248830	InLab® Max Pro-ISM	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe and ISM, glass shaft, KCl electrolyte, fixed sleeve junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
51343070	InLab® Science	For challenging samples, pH 0...12, temp. 0...100°C, glass shaft, KCl electrolyte, movable sleeve junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51344072	InLab® Science Pro-ISM	For challenging samples, pH 0...12, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, KCl electrolyte, movable sleeve junction, ARGENTHAL™, dimensions: 12x170 mm, MultiPin™ connector
51343031	InLab® Versatile Pro	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, polysulfone shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, 1.2 m cable, BNC/RCA (Cinch)

Maintenance Free Electrodes

Item No	Description	Product Remarks
51343100	InLab® Expert	For general application, pH 0...14, temp. 0...100°C, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343104	InLab® Expert NTC30	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
51343105	InLab® Expert Pt1000	For general application, pH 0...14, temp. 0...100°C, integrated Pt1000 temperature probe, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
51343101	InLab® Expert Pro	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, 1,2 m cable, BNC/RCA (Cinch)
30014096	InLab® Expert Pro-ISM	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, ISM, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, 1,2 m cable, BNC/RCA (Cinch)
51343103	InLab® Expert DIN	For general application, pH 0...14, temp. 0...100°C, integrated NTC Pt1000 temperature probe, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, 1,2 m cable, DIN4mm
51343102	InLab® Expert Pro-2m-ISM	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, ISM, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, 2 m cable, BNC/RCA (Cinch)
51343110	InLab® Power	For general application, pH 0...12, temp. 0...130°C, glass shaft, DPA-gel, ceramic junction, SteadyForce™, dimensions: 12x120 mm, S7 connector
51344211	InLab® Power Pro-ISM	For general application, pH 0...12, temp. 0...130°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, DPA-gel, ceramic junction, SteadyForce™, dimensions: 12x170 mm, MultiPin™ connector
51343010	InLab® Easy	For general application, pH 0...14, temp. 0...80°C, polysulfone shaft, gel electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343011	InLab® Easy BNC	For general application, pH 0...14, temp. 0...80°C, polysulfone shaft, gel electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, 1,2 m cable, BNC

Special Applications

Electrodes for Small Volumes

Item No	Description	Product Remarks
30244732	InLab® Ultra Micro-ISM	For small sample volumes, pH 1...11, temp. 0...80°C, ISM, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 3x40 mm, MultiPin™ connector
51343160	InLab® Micro	For small sample volumes, pH 0...14, temp. 0...80°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 3x60 mm, S7 connector
51344163	InLab® Micro Pro-ISM	For small sample volumes, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 5x130 mm, MultiPin™ connector
51343165	InLab® Semi-Micro	For small sample volumes, pH 0...12, temp. 0...100°C, glass shaft, XEROLYT® EXTRA polymer electrolyte with open junction, ARGENTHAL™, dimensions: 6x100 mm, S7 connector
30092990	InLab® Nano	For small sample volumes, pH 0...14, temp. 0...80°C, glass shaft, KCl electrolyte, ceramic junction, Ag/AgCl, dimensions: 1.7x30 mm, 1 m cable, BNC
59904572	InLab® NMR	For small sample volumes, pH 0...14, temp. 0...80°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 3x200 mm, S7 connector
51343164	InLab® Flex-Micro	For small sample volumes, pH 0...14, temp. 0...80°C, epoxy shaft, gel electrolyte, porous PTFE junction, ARGENTHAL™, dimensions: 6x180 mm, 1 m cable, BNC

Electrodes for Specific Applications

Item No	Description	Product Remarks
51343153	InLab® Solids	For solid and semisolid samples, pH 1...11, temp. 0...80°C, glass shaft, XEROLYT® EXTRA polymer electrolyte with open junction, ARGENTHAL™, dimensions: 6x25 mm, S7 connector
51344155	InLab® Solids Pro-ISM	For solid and semisolid samples, pH 1...11, temp. 0...80°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, XEROLYT® EXTRA polymer electrolyte with open junction, ARGENTHAL™, dimensions: 6x25 mm, MultiPin™ connector
51343150	InLab® Viscous	For viscous and sticky samples, pH 0...14, temp. 0...130°C, glass shaft, FRISCOLYT-C®, ceramic junction, SteadyForce™, dimensions: 6x40 mm, S7 connector
51343151	InLab® Viscous Pro-ISM	For viscous and sticky samples, pH 0...14, temp. 0...130°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, FRISCOLYT-C®, ceramic junction, SteadyForce™, dimensions: 6x40 mm, MultiPin™ connector
59904591	InLab® Dairy	For protein containing samples like dairy products, pH 0...12, temp. 0...100°C, glass shaft, FRISCOLYT-B®, triple ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343157	InLab® Surface	For measurements of surfaces, pH 1...11, temp. 0...50°C, glass shaft, KCl electrolyte, ceramic ring junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
30249570	InLab® Surface Pro-ISM	For measurements of surfaces, pH 1...11, temp. 0...50°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, KCl electrolyte, ceramic ring junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
30248112	InLab® Pure	For ion-weak samples, pH 1...11, temp. 0...80°C, glass shaft, KCl electrolyte, fixed sleeve junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51344172	InLab® Pure Pro-ISM	For ion-weak samples, pH 1...11, temp. 0...80°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, 1 mol/L KCl electrolyte, fixed sleeve junction, ARGENTHAL™, dimensions: 12x170 mm, MultiPin™ connector
51343174	InLab® Cool	For low temperature samples, pH 1...11, temp. -30...80°C, glass shaft, FRISCOLYTE-B®, fixed sleeve junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
30247850	InLab® Cool Pro-ISM	For low temperature samples, pH 1...11, temp. -30...80°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, FRISCOLYTE-B®, fixed sleeve junction, ARGENTHAL™, dimensions: 12x120 mm, MultiPin™ connector
30253098	InLab® Water Go	For soft surface water, pH 1...11, temp. 0...80°C, polysulfone shaft, KCl electrolyte, porous PTFE ring junction, ARGENTHAL™, dimensions: 12x120 mm, 1.8 m cable, BNC
51343176	InLab® Hydrofluoric	For hydrofluoric acid containing samples, pH 1...11, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector

Long Electrodes

Item No	Description	Product Remarks
30244733	InLab® Reach 225	Long sensor, pH 0...14, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x225 mm, S7 connector
30248120	InLab® Reach 425	Long sensor, pH 0...14, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x425 mm, S7 connector
30248826	InLab® Reach Pro-225	Long sensor, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x225 mm, MultiPin™ connector
51343061	InLab® Reach Pro-425	Long sensor, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x425 mm, MultiPin™ connector
30248828	InLab® Reach Pt1000-225	Long sensor, pH 0...14, temp. 0...100°C, integrated Pt1000 temperature probe, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x225 mm, MultiPin™ connector
51343062	InLab® Reach Pt1000-425	Long sensor, pH 0...14, temp. 0...100°C, integrated Pt1000 temperature probe, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x425 mm, MultiPin™ connector
51343161	InLab® Semi-Micro-L	For small sample volumes, pH 0...14, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 6x230 mm, S7 connector

Special Technology

Item No	Description	Product Remarks
30027775	InLab® Smart Pro-ISM	Digital electrode for general application, pH 0...14, temp. 0...130°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, DPA-gel, ceramic junction, SteadyForce™, dimensions: 12x120 mm, K8SD connector
59902917	InLab® Flow	For measurement in Flow-through cell 611, pH 1...11, temp. 0...80°C, glass shaft, DPA-gel, double ceramic junction, SteadyForce™, dimensions: 7x40 mm, S7 connector
59904354	Flow through cell thermostatable	Thermostatable flow through cell 611
59902854	pH electrode RedCap U-402-S7/120	For general application, pH 0...14, temp. 0...80°C, glass shaft, KCl electrolyte, ceramic junction, Ag/AgCl, dimensions: 12x120 mm, S7 connector

pH Electrodes for Portable Meters

Item No	Description	Product Remarks
51340288	InLab® Expert Go	pH electrode with NTC 30K temperature probe, pH 0...14, temp. 0...80°C, PEEK shaft, ARGENTHAL™, open junction, XEROLYT® polymer electrolyte, 2 m cable BNC/RCA (Cinch), IP67 for SevenGo™
51344102	InLab® Expert Go-ISM	For general application (IP67, Seven portable meters), pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, ISM, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, 1.8 m cable, BNC/RCA (Cinch)
51344103	InLab® Expert Go-5m-ISM	For general application (IP67, Seven portable meters), pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, ISM, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, 5 m cable, BNC/RCA (Cinch)
51344104	InLab® Expert Go-10m-ISM	For general application (IP67, Seven portable meters), pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe, ISM, PEEK shaft, XEROLYT® polymer electrolyte with open junction, ARGENTHAL™, dimensions: 12x120 mm, 5 m cable, BNC/RCA (Cinch)
30248832	InLab® Routine Go-ISM	For general application, pH 0...14, temp. 0...100°C, integrated NTC 30 kΩ temperature probe and ISM, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, 1.8 m cable, BNC/RCA (Cinch)
51343156	InLab® Solids Go-ISM	For solid and semisolid samples (IP67, Seven portable meters), pH 1...11, temp. 0...80°C, integrated NTC 30 kΩ temperature probe, ISM, glass shaft, XEROLYT® EXTRA polymer electrolyte with open junction, ARGENTHAL™, dimensions: 6x25 mm, 1.8 m cable, BNC/RCA

pH Half-Cells and Reference Electrodes

Item No	Description	Product Remarks
51343195	InLab® Mono	pH half-cell, pH 0...14, temp. 0...100°C, glass shaft, dimensions: 12x120 mm, S7 connector
51343196	InLab® Mono Plus	pH half-cell, pH 0...12, temp. 0...130°C, glass shaft, dimensions: 12x120 mm, S7 connector
51343190	InLab® Reference	Reference electrode, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343191	InLab® Reference-Plus	Reference electrode, temp. 0...60°C, glass shaft, gel electrolyte, movable PTFE-sleeve junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343192	InLab® Reference-Flow	Reference electrode, temp. 0...130°C, glass shaft, KCl electrolyte, triple ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector

LE pH Electrodes

Item No	Description	Product Remarks
51340330	LE407	Robust plastic pH electrode with gel electrolyte, suitable for simple applications and easy samples such as water; low-maintenance
51340347	LE408	Robust plastic pH electrode with refillable liquid electrolyte, suitable for simple applications, with BNC connector
51340331	LE409	Glass pH electrode with liquid electrolyte for simple and rapid measurements in the laboratory, aqueous samples such as acids, bases etc.; refillable electrolyte
51340332	LE420	Glass electrode with ground-joint diaphragm for demanding, "dirty" samples such as waste water, emulsions (e.g. milk), oily samples; refillable electrolyte
51340333	LE427	Robust plastic pH electrode with gel electrolyte and spear tip, suitable for solid samples or semisolids, 1 m fixed cable BNC; low-maintenance
51340334	LE427-S7	Robust plastic pH electrode with gel electrolyte and spear tip, suitable for solid samples or semisolids, S7 connector (available until stock lasts)
51340242	LE438 (plastic, 3-in-1)	3-in-1 plastic electrode with integrated temperature sensor for field use, samples with fluctuating temperatures; low-maintenance
51340341	LE407-DIN	Robust plastic pH electrode with gel electrolyte, suitable for simple applications and easy samples such as water; low-maintenance with DIN connector (available until stock lasts)
51340342	LE408-DIN	Robust plastic pH electrode with refillable liquid electrolyte, suitable for simple applications with DIN connector (available until stock lasts)
51340343	LE409-DIN	Glass pH electrode with liquid electrolyte for simple and rapid measurements in the laboratory, aqueous samples such as acids, bases etc.; refillable electrolyte with DIN connector (available until stock lasts)
51340345	LE420-DIN	Glass electrode with ground-joint diaphragm for demanding, "dirty" samples such as waste water, emulsions (e.g. milk), oily samples; refillable electrolyte with DIN connector (available until stock lasts)
51340346	LE438-DIN	3-in-1 plastic electrode with integrated temperature sensor for field use, samples with fluctuating temperatures; low-maintenance with DIN / 4 mm banana connector (available until stock lasts)
30089747	LE422	Micro pH electrode suitable for small samples in vials and test tubes (4.3 mm diameter). Low-maintenance thanks to gel electrolyte
51340348	LE410	3-in-1 glass pH electrode with integrated temperature sensor and refillable liquid electrolyte for rapid measurements in aqueous samples such as acids or bases with BNC/Cinch connector
30247153	LE438 IP67	3-in-1 plastic pH electrode for field use, samples with fluctuating temperatures; low-maintenance and all in IP67 with NTC30 temp. probe, nylon junction, Ag/AgCl reference system, gel electrolyte, 120 mm plastic shaft, diameter 12 mm, 1.0 m cable, BNC/RCA (Cinch)
30259840	LE427 IP67	Robust puncture pH electrode suitable for penetration measurements of food, soil and other solids or semi-solids with ceramic junction, Ag/AgCl reference system, DPA gel electrolyte, 17 mm plastic shaft, diameter 6 mm, 1.2 m cable, BNC and all in IP67

ORP / Redox Electrodes

Platinum, Gold and Silver Electrodes

Redox is an ideal solution for testing the oxidation/reduction in factory and industrial waste (chromium and cyanide concentration), fish farming and aquariums (water quality), and swimming pools (sanitation levels).

www.electrodes.net/en/dealer



InLab® ORP / Redox Electrodes

Item No	Description	Product Remarks
51343200	InLab® Redox	Combined redox electrode, platinum ring, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343202	InLab® Redox-L	Combined redox electrode, platinum ring, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x170 mm, S7 connector
51343201	InLab® Redox Flow	Combined redox electrode, platinum ring, temp. 0...100°C, glass shaft, KCl electrolyte, movable glass sleeve junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343203	InLab® Redox Micro	Combined redox electrode, platinum ring, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 6x100 mm, S7 connector
51343204	InLab® Redox Au	Combined redox electrode, gold ring, temp. 0...100°C, glass shaft, KCl electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
51343205	InLab® Redox Ag	Combined redox electrode, silver ring, temp. 0...100°C, glass shaft, KNO ₃ electrolyte, ceramic junction, ARGENTHAL™, dimensions: 12x120 mm, S7 connector
59904377	InLab® Redox Pt805	Metal half-cells, platinum ring, temp. -30...130°C, glass shaft, dimensions: 12x120 mm, S7 connector
59904391	InLab® Redox Ag805	Metal half-cells, silver tip, temp. -30...130°C, glass shaft, dimensions: 12x120 mm, S7 connector
59904408	InLab® Redox Ag850	Metal half-cells, silver ring, temp. -30...130°C, glass shaft, dimensions: 12x120 mm, S7 connector

LE ORP / Redox Electrodes

Item No	Description	Product Remarks
51340338	LE501	Glass ORP electrode for lab use
51340339	LE510	Robust plastic ORP electrodes for field use, e.g. swimming pools

Conductivity Probes

Ions in motion

METTLER TOLEDO offers the full range of conductivity cells.

www.electrodes.net/en/dealer



Conductivity Probes for Bench Meters

Item No	Description	Product Remarks
51344020	InLab® 731	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, epoxy shaft, dimensions: 12x120 mm, 1.2 m cable, Mini-DIN
51344022	InLab® 731-2m	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, epoxy shaft, dimensions: 12x120 mm, 2 m cable, Mini-DIN
30014092	InLab® 731-ISM	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, epoxy shaft, dimensions: 12x120 mm, 1.2 m cable, Mini-DIN
30014093	InLab® 731-ISM-2m	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, epoxy shaft, dimensions: 12x120 mm, 2 m cable, Mini-DIN
51344024	InLab® 741	For low conductivity range like pure water, 0.001 ... 500 μS/cm, 0...100°C, 2 steel poles, cell constant: 0.105 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, stainless steel shaft, dimensions: 12x120 mm, 1.2 m cable, Mini-DIN
51344026	InLab® 741-5m	For low conductivity range like pure water, 0.001 ... 500 μS/cm, 0...100°C, 2 steel poles, cell constant: 0.105 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, stainless steel shaft, dimensions: 12x120 mm, 5 m cable, Mini-DIN
30014094	InLab® 741-ISM	For low conductivity range like pure water, 0.001 ... 500 μS/cm, 0...100°C, 2 steel poles, cell constant: 0.105 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, stainless steel shaft, dimensions: 12x120 mm, 1.2 m cable, Mini-DIN
30014097	InLab® Trace	Digital conductivity sensor for low conductivity range like ultra pure water, 0.0001 ... 1000 μS/cm, 0...100°C, 2 titanium poles, cell constant: 0.01 cm ⁻¹ , integrated Pt1000 temperature probe, ISM, IP67, titanium shaft, dimensions: 12x67 mm, 1.8 m cable
51302256	InLab® 710	For aggressive and organic samples, 0.01 ... 500 mS/cm, 0...100°C, 4 platinum poles, cell constant: 0.80 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, glass shaft, dimensions: 12x120 mm, cable 1 m, Mini-DIN
51302255	InLab® 720	For aggressive and organic samples, 0.1 ... 500 μS/cm, 0...100°C, 2 platinum poles, cell constant: 0.06 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, glass shaft, dimensions: 12x120 mm, 1 m cable, Mini-DIN
30014160	InLab® 725	For Bioethanol according ABTN NBR 10547, 0.1 ... 500 μS/cm, 0...100°C, 2 platinum poles, cell constant: 0.1 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, glass shaft, dimensions: 12x120 mm, 1 m cable, Mini-DIN
51344030	InLab® 751-4mm	For small sample volumes, 0.01 ... 100 mS/cm, 0...100°C, 2 platinum poles, cell constant: 1.0 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, glass shaft, dimensions: 4x120 mm, 1 m cable, Mini-DIN
51344031	InLab® 752-6mm	For small sample volumes, 0.01 ... 112 mS/cm, 0...100°C, 2 platinum poles, cell constant: 1.0 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, glass shaft, dimensions: 6x120 mm, 1 m cable, Mini-DIN

Conductivity Probes for Portable Meters

Item No	Description	Product Remarks
51344120	InLab® 738	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, IP67, epoxy shaft, dimensions: 12x120 mm, 1.8 m cable, LTW
51344122	InLab® 738-5m	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, IP67, epoxy shaft, dimensions: 12x120 mm, 5 m cable, LTW
51344124	InLab® 738-10m	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, IP67, epoxy shaft, dimensions: 12x120 mm, 10 m cable, LTW
51344110	InLab® 738-ISM	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, IP67, epoxy shaft, dimensions: 12x120 mm, 1.8 m cable, LTW
51344112	InLab® 738-ISM-5m	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, IP67, epoxy shaft, dimensions: 12x120 mm, 5 m cable, LTW
51344114	InLab® 738-ISM-10m	For general application, 0.01 ... 1000 mS/cm, 0...100°C, 4 graphite poles, cell constant: 0.57 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, IP67, epoxy shaft, dimensions: 12x120 mm, 10 m cable, LTW
51344126	InLab® 742	For low conductivity range like pure water, 0.001 ... 500 µS/cm, 0...100°C, 2 steel poles, cell constant: 0.105 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, IP67, stainless steel shaft, dimensions: 12x120 mm, 1.8 m cable, LTW
51344128	InLab® 742 5m	For low conductivity range like pure water, 0.001 ... 500 µS/cm, 0...100°C, 2 steel poles, cell constant: 0.105 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, IP67, stainless steel shaft, dimensions: 12x120 mm, 5 m cable, LTW
51344116	InLab® 742 ISM	For low conductivity range like pure water, 0.001 ... 500 µS/cm, 0...100°C, 2 steel poles, cell constant: 0.105 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, IP67, stainless steel shaft, dimensions: 12x120 mm, 1.8 m cable, LTW
51344118	InLab® 742 ISM-5m	For low conductivity range like pure water, 0.001 ... 500 µS/cm, 0...100°C, 2 steel poles, cell constant: 0.105 cm ⁻¹ , integrated NTC 30 kΩ temperature probe, ISM, IP67, stainless steel shaft, dimensions: 12x120 mm, 5 m cable, LTW
59904438	RedCap 950-K19/120/1M/2x-27.4	2 pole conductivity probe, plastic shaft 120 mm, cell constant 1, 1 m cable, 4 mm banana plugs

LE Conductivity Probes

Item No	Description	Product Remarks
51340335	LE703	Cond. sensor with NTC30 temp. probe, 4 graphite poles, 120 mm PC (+ABS) shaft, diameter 12 mm, 1.0 m cable, Mini-DIN
51340336	LE740	Entry-level conductivity sensor for pure water with NTC30kOhm temp. probe, 2 stainless steel poles, 120 mm PVC, stainless steel shaft, diameter 12 mm, 1.0 m cable, Mini-DIN
30266974	LE703 IP67	Robust conductivity sensor for medium to high conductivities (70 µS/cm...200 mS/cm) with NTC30 temp. probe, 120 mm PC (+ABS) shaft, diameter 12 mm, 1.0 m cable, Mini-DIN and all in IP67

Ion-Selective and Gas Sensitive Electrodes

Concentration and activity determination

METTLER TOLEDO offers one of the most comprehensive ISE portfolios in the market, covering 19 ion species and 3 gases. Their robust design, easy maintenance and long lifetime make them ideal for any user and almost any application.

www.electrodes.net/en/dealer



Ion-Selective and Gas Sensitive Electrodes (Half-Cells)

Item No	Product Remarks
51107673	DX207-Li ISE half-cell electrode
51107687	Membrane kit for Lithium ISE (1 membrane + electrolyte)
51107881	Electrolyte for Lithium ISE, 20 mL
51340900	DX218-NH4 ISE half-cell electrode
51340012	Membrane Kit for Ammonium ISE (1 membrane + electrolyte)
51340035	Electrolyte for Ammonium ISE, 20 mL
51340500	DX219-F ISE half-cell electrode
51340008	Membrane Kit for Fluoride ISE (1 membrane + electrolyte)
51340031	Electrolyte for Fluoride ISE, 20 mL
51340263	DX223-Na ISE half-cell electrode
51107681	DX226-CN ISE half-cell electrode
51107695	Membrane kit for Cyanide ISE (1 membrane + electrolyte)
51107893	Electrolyte for Cyanide ISE, 20 mL
51107675	DX232-S ISE half-cell electrode
51107689	Membrane kit for Sulfide ISE (1 membrane + electrolyte)
51107894	Electrolyte for Sulfide ISE, 20 mL
51340400	DX235-Cl ISE half-cell electrode
51340007	Membrane Kit for Chloride ISE (1 membrane + electrolyte)
51340030	Electrolyte for Chloride ISE, 20 mL
51340700	DX239-K ISE half-cell electrode
51340010	Membrane Kit for Potassium ISE (1 membrane + electrolyte)
51340033	Electrolyte for Potassium ISE, 20 mL
51340600	DX240-Ca ISE half-cell electrode
51340009	Membrane Kit for Calcium ISE (1 membrane + electrolyte)
51340032	Electrolyte for Calcium ISE, 20 mL
51107870	DX258-SCN ISE half-cell electrode
51107871	Membrane kit for Thiocyanate ISE (1 membrane + electrolyte)
51107872	Electrolyte for Thiocyanate ISE, 20 mL
51340800	DX262-NO3 ISE half-cell electrode
51340011	Membrane Kit for Nitrate ISE (1 membrane + electrolyte)
51340034	Electrolyte for Nitrate ISE, 20 mL
51107678	DX264-Cu ISE half-cell electrode
51107692	Membrane kit for Copper ISE (1 membrane + electrolyte)
51107889	Electrolyte for Copper ISE, 20 mL
51340300	DX280-Br ISE half-cell electrode

Item No	Product Remarks
51340006	Membrane Kit for Bromide ISE (1 membrane + electrolyte)
51340029	Electrolyte for Bromide ISE, 20 mL
51107676	DX287-BF4 ISE half-cell electrode
51107690	Membrane kit for Fluoroborate ISE (1 membrane + electrolyte)
51107890	Electrolyte for Fluoroborate ISE, 20 mL
51107672	DX312-Cd ISE half-cell electrode
51107686	Membrane kit for Cadmium ISE (1 membrane + electrolyte)
51107891	Electrolyte for Cadmium ISE, 20 mL
51107680	DX327-I ISE half-cell electrode
51107694	Membrane kit for Iodide ISE (1 membrane + electrolyte)
51107898	Electrolyte for Iodide ISE, 20 mL
51107674	DX337-Ba ISE half-cell electrode
51107688	Membrane kit for Barium ISE (1 membrane + electrolyte)
51107892	Electrolyte for Barium ISE, 20 mL
51107873	DX407-Pb ISE half-cell electrode
51107874	Membrane Kit for Lead ISE (1 membrane + electrolyte)
51107875	Electrolyte for Lead ISE, 20 mL
51341000	GSE Ammonia Electrode
51340013	Membrane Kit for GSE Ammonia (3 membranes + electrolyte)
51340036	Electrolyte for Ammonia GSE, 25 mL
51340037	Electrolyte f. nitrogen oxides NOx, 25mL
51340038	Electrolyte for CO2 GSE, 25 mL

Ion-Selective Electrodes (Combination)

Item No	Product Remarks
51344703	perfectION™ combined Calcium electrode with 1.2 m cable and BNC connector
51344700	perfectION™ combined Silver/Sulfide electrode with 1.2 m cable and BNC connector
51344706	perfectION™ combined Chloride electrode with 1.2 m cable and BNC connector
51344709	perfectION™ combined Cyanide electrode with 1.2 m cable and BNC connector
51344712	perfectION™ combined Cupric electrode with 1.2 m cable and BNC connector
51344715	perfectION™ combined Fluoride electrode with 1.2 m cable and BNC connector
51344718	perfectION™ combined Iodide electrode with 1.2 m cable and BNC connector
51344721	perfectION™ combined Potassium electrode with 1.2 m cable and BNC connector
51344724	perfectION™ combined Sodium electrode with S7 head
51344727	perfectION™ combined Nitrate electrode with 1.2 m cable and BNC connector
51344730	perfectION™ combined Lead electrode with 1.2 m cable and BNC connector
51344850	perfectION™ membrane module for combined Calcium electrode
51344851	perfectION™ membrane module for combined Potassium electrode
51344852	perfectION™ membrane module for combined Nitrate electrode
51344800	perfectION™ combined Silver/Sulfide electrode with 1.2 m cable and Lemo connector
51344803	perfectION™ combined Calcium electrode with 1.2 m cable and Lemo connector
51344806	perfectION™ combined Chloride electrode with 1.2 m cable and Lemo connector
51344809	perfectION™ combined Cyanide electrode with 1.2 m cable and Lemo connector
51344753	perfectION™ ion electrolyte D reference filling solution D 5x60 mL
51344754	perfectION™ ion electrolyte E reference filling solution E 5x60 mL
51344755	perfectION™ ion electrolyte F reference filling solution F 5x60 mL

Item No	Product Remarks
51344812	perfectION™ combined Cupric electrode with 1.2 m cable and Lemo connector
51344815	perfectION™ combined Fluoride electrode with 1.2 m cable and Lemo connector
51344818	perfectION™ combined Iodide electrode with 1.2 m cable and Lemo connector
51344821	perfectION™ combined Potassium electrode with 1.2 m cable and Lemo connector
51344827	perfectION™ combined Nitrate electrode with 1.2 m cable and Lemo connector
51344830	perfectION™ combined Lead electrode with 1.2 m cable and Lemo connector
51344750	perfectION™ ion electrolyte A reference filling solution 5x60 mL
51344751	perfectION™ ion electrolyte B reference filling solution B 5x60 mL
51344752	perfectION™ ion electrolyte C reference filling solution C 5x60 mL

ISE Calibration Standards and ISA Solutions

Item No	Product Remarks
51344760	perfectION™ Ionic Strength Adjuster for Solid State Ion Selective Electrodes 475 mL
51344761	perfectION™ Calcium Ionic Strength Adjuster 475 mL
51344762	perfectION™ Potassium Ionic Strength Adjuster 475 mL
51344763	perfectION™ Nitrate Ionic Strength Adjuster 475 mL
51344764	perfectION™ Nitrate Interference Suppressor Solution 475 mL
51344765	perfectION™ Total Ionic Strength Adjustment Buffer II with CDTA 3790 mL
51344766	perfectION™ Total Ionic Strength Adjustment Buffer III concentrate with CDTA 475 mL
51344770	Silver ISE standard solution, 1000 mg/L 500 mL
51344771	Calcium ISE standard solution, 1000 mg/L 500 mL
51344772	Chloride ISE standard solution, 1000 mg/L 500 mL
51344773	Cyanide ISE standard solution, 1000 mg/L 500 mL
51344774	Copper ISE standard solution, 1000 mg/L 500 mL
51344775	Fluoride ISE standard solution, 1000 mg/L 500 mL
51344776	Iodide ISE standard solution, 1000 mg/L 500 mL
51344777	Potassium ISE standard solution, 1000 mg/L 500 mL
51344778	Sodium ISE standard solution, 1000 mg/L 500 mL
51344779	Nitrate ISE standard solution, 1000 mg/L 500 mL
51344780	Lead ISE standard solution, 1000 mg/L 500 mL
51344781	Sulphide ISE standard solution, 1000 mg/L 500 mL

DO Sensors

Origin of Precision

IP67 - For a water-proof measurement

Ensures your entire portable measuring system (Seven2Go meter and InLab sensor) is able to withstand wet and demanding environments.

Always the right temperature

The integrated temperature probe guarantees you always measure with the right temperature compensation.

www.electrodes.net/en/dealer



InLab® DO Sensors

Item No	Description	Product Remarks
51344621	InLab® OptiOx	Optical DO sensor for general applications, 0,0...500% / 0 ... 50 mg/L, 0...50°C, integrated NTC 30 kΩ temperature probe, ISM, IP67, PC/ABS shaft, dimensions: 16x65 mm, 1.8 m cable, Mini-LTW
51344622	InLab® OptiOx-5m	Optical DO sensor for general applications, 0,0...500% / 0 ... 50 mg/L, 0...50°C, integrated NTC 30 kΩ temperature probe, ISM, IP67, PC/ABS shaft, dimensions: 16x65 mm, 5 m cable, Mini-LTW
51344623	InLab® OptiOx-10m	Optical DO sensor for general applications, 0,0...500% / 0 ... 50 mg/L, 0...50°C, integrated NTC 30 kΩ temperature probe, ISM, IP67, PC/ABS shaft, dimensions: 16x65 mm, 10 m cable, Mini-LTW
51340291	InLab® 605	0,0...200%, 0...60°C, IP67, 1.8 m cable, integrated temperature probe, body made of glass fiber reinforced PPS, silicone/Teflon membrane, interchangeable membrane bodies for SevenGo™ SG6
51340292	InLab® 605-10m	0,0...200%, 0...60°C, IP67, 2m cable, integrated temperature probe, body made of glass fiber reinforced PPS, silicone/Teflon membrane, interchangeable membrane bodies for SevenGo™ SG6
51344611	InLab® 605-ISM-2m	Polarographic DO sensor for general applications in harsh environments, 0,0...200% / 0 ... 20 mg/L, 0...60°C, integrated NTC 22 kΩ temperature probe, ISM, IP67, PPS shaft, dimensions: 12x120 mm, 1.8 m cable, BNC/RCA (Cinch)
51344612	InLab® 605-ISM-5m	Polarographic DO sensor for general applications in harsh environments, 0,0...200% / 0 ... 20 mg/L, 0...60°C, integrated NTC 22 kΩ temperature probe, ISM, IP67, PPS shaft, dimensions: 12x120 mm, 5 m cable, BNC/RCA (Cinch)
51344613	InLab® 605-ISM-10m	Polarographic DO sensor for general applications in harsh environments, 0,0...200% / 0 ... 20 mg/L, 0...60°C, integrated NTC 22 kΩ temperature probe, ISM, IP67, PPS shaft, dimensions: 12x120 mm, 10 m cable, BNC/RCA (Cinch)

LE DO Sensors

Item No	Description	Product Remarks
51340401	LE611	Galvanic DO probe with 1.1 m cable, low maintenance with BNC connector (available until stock lasts)
51340402	LE612	Galvanic DO probe with 5 m cable, low maintenance with BNC connector (available until stock lasts)
51340403	LE621	Galvanic DO sensor with 1.1 m cable and integrated temperature probe
51340404	LE622	Galvanic DO sensor with 5 m cable and integrated temperature probe (available until stock lasts)
30266975	LE621 IP67	Dissolved Oxygen Sensor IP67 2 m cable

Temperature Probes

Always the right temperature
The integrated temperature probe guarantees you always measure with the right temperature compensation.



Temperature Probes

Item No	Description
51300164	Separate temperature probes for general application, 0...130°C, integrated NTC 30 kΩ temperature probe, stainless steel shaft, dimensions: 3x120 mm, 1.2 m cable, BNC/RCA (Cinch)
51300165	Separate temperature probes for general application, 0...130°C, integrated Pt1000 temperature probe, stainless steel shaft, dimensions: 3x120 mm, 1.2 m cable, 2x4 mm banana
51343310	Separate temperature probes for general application, 0...130°C, integrated NTC 30 kΩ temperature probe, glass shaft, dimensions: 12x120 mm, S7 connector
51343312	Separate temperature probes for general application, 0...130°C, integrated Pt1000 temperature probe, glass shaft, dimensions: 12x120 mm, S7 connector

Sensor Accessories

Ions in motion

METTLER TOLEDO provides a complete offering of electrode accessories including wetting caps, adapters, flow through cells and electrode fill port closures.



Sensor Accessories

Item No	Description
51340021	Wetting caps 8 mm
51340024	Adapter NS 14/15 12 mm
51343320	Electrode storage vial
51303019	Electrode sinker
59904354	Flow through cell thermostatable
51302257	Glass flow-through cell
51300140	DO zero oxygen tablets
51344630	OptiOx replacement Cap
51344631	OptiOx calibration Tube
51344632	OptiOx protective Guard
51344633	OptiOx BOD Adapter
30246619	OptiOx Adapter for uPlace
51340295	Sealing Kit InLab® 605
30247853	Knick adapter
30243851	Wetting cap InLab® 12 mm
30248827	SafeLock blue (5 pcs.)
30248829	SafeLock white (5 pcs.)
51340267	Replacement Junction Tool for InLab® Versatile Pro
51340268	Set of Replaceable Junctions (Set of 10 ceramic junctions)

Buffers and Solutions

Top sellers for the most common use

All METTLER TOLEDO calibration and cleaning solutions are available in handy bottles with no-fuss labels. Electrolytes come with special caps that make refilling your electrode easy.



Buffer Solutions

Item No	Description
51350002	Technical buffer pH 2.00, 250 mL
51350016	Technical buffer pH 2.00, 6x250 mL
51350004	Technical buffer pH 4.01, 250 mL
51350018	Technical buffer pH 4.01, 6x250 mL
51302069	Technical buffer pH 4.01, sachets 30x20 mL
51350006	Technical buffer pH 7.00, 250 mL
51350020	Technical buffer pH 7.00, 6x250 mL
51302047	Technical buffer pH 7.00 sachets 30x20 mL
51350008	Technical buffer pH 9.21, 250 mL
51350022	Technical buffer pH 9.21, 6x250 mL
51302070	Technical buffer pH 9.21, sachets 30x20 mL
51350010	Technical buffer pH 10.00, 250 mL
51350024	Technical buffer pH 10.00, 6x250 mL
51302079	Technical buffer pH 10.01, sachets 30x20 mL
51350012	Technical buffer pH 11.00, 250 mL
51350026	Technical buffer pH 11.00, 6x250 mL
51302068	Rainbow I (3x10 sachets 20 mL) pH 4.01; pH 7.00; pH 9.21
51302080	Rainbow II (3x10 sachets 20 mL) pH 4.01; pH 7.00; pH 10.01
30095312	Bottle Rainbow Kit 1, 6x250 mL
30095313	Bottle Rainbow Kit 2, 6x250 mL
30095314	All-in-One Kit 1, 6x250 mL
30095315	All-in-One Kit 2, 6x250 mL
51350052	NIST/DIN buffer pH 4.006, 250 mL
51350054	NIST/DIN buffer pH 6.865, 250 mL
51350056	NIST/DIN buffer pH 9.180, 250 mL
51350058	NIST/DIN buffer pH 10.012, 250 mL
51350032	Certified buffer pH 4.01, 250 mL
51350042	Certified buffer pH 4.01, 6x250 mL
51350034	Certified buffer pH 7.00, 250 mL
51350044	Certified buffer pH 7.00, 6x250 mL
51350036	Certified buffer pH 9.21, 250 mL
51350046	Certified buffer pH 9.21, 6x250 mL
51350038	Certified buffer pH 10.00, 250 mL
51350048	Certified buffer pH 10.00, 6x250 mL
51350060	Redox buffer 220 mV/pH 7.00, 250 mL
51350062	Redox buffer 220 mV/pH 7.00, 6x250 mL
51350064	Redox buffer 468 mV/pH 0.1, 6x30 mL

Item No	Description
30111134	Techn. Buffer pH 2.00, sachets 30x20 mL
30111135	Techn. Buffer pH 11.00, sachets 30x20 mL
30111136	NIST/DIN Buffer pH 4.006, sachets 30x20 mL
30111137	NIST/DIN Buffer pH 6.856 sachets 30x20 mL
30111138	NIST/DIN Buffer pH 9.180 sachets 30x20 mL
30111139	NIST/DIN Buffer pH 10.012 sachets 30x20 mL

Electrolytes

Item No	Description
51350078	Electrolyte 1 mol/L KNO ₃ , 250 mL
51350108	ISA solution 0.9 mol/L Al ₂ (SO ₄) ₃ , 250 mL
51350106	ISA solution TISAB 3, 250 mL
51350082	Electrol. 3 mol/L KCl Sat AgCl, 6x250 mL
51350086	Electrolyte 1 mol/L KNO ₃ , 6x250 mL
51350074	Electrolyte 3 mol/L KCl Sat AgCl, 250 mL
51350072	Electrolyte 3 mol/L KCl, 250 mL
51350080	Electrolyte 3 mol/L KCl, 6x250 mL
51350076	Electrolyte FRISCOLYT-B, 250 mL
51350084	Electrolyte FRISCOLYT-B, 6x250 mL
51302046	DO probe refill, 30 mL
51343181	1 mol/L KCl, 25 mL
51343180	3 mol/L KCl, 25 mL
51343182	1 mol/L KNO ₃ , 25 mL
51343184	KCl-Solution 3 mol/L, AgCl saturated, 25 mL
51350088	LiCl 1M/EtOH Electrolyte 6x30 mL
51343185	Friscolyt-B, 25 mL

Conductivity Standards

Item No	Description
30090847	Check solution 1.3 µS/cm (single-use), 250 mL
30094617	Cond standard 5 µS/cm, 250 mL
51300169	Cond standard 10 µS/cm, 250 mL
51302153	Cond standard 84 µS/cm, 250 mL
51300170	Cond standard 500 µS/cm, 250 mL
51350092	Cond standard 1413 µS, 250 mL
51350096	Cond standard 1413 µS, 6x250 mL
51302049	Cond standard 1413 µS, sachets 30x20 mL
51350094	Cond standard 12.88 mS, 250 mL
51350098	Cond standard 12.88 mS, 6x250 mL
51302050	Cond standard 12.88 mS/cm, sachets 30x20 mL
30111140	Cond standard 84 µS/cm, sachets 10x20 mL
30111141	Cond standard 10 µS/cm, sachets 10x20 mL

Ion Standards

Item No	Description
30090851	Ion standard F 100 mg/L, 500 mL
30090852	Ion standard F 10 mg/L, 500 mL
30090853	Ion standard Cl 100 mg/L, 500 mL
30090854	Ion standard Cl 10 mg/L, 500 mL
30090855	Ion standard Ca 100 mg/L, 500 mL
30090856	Ion standard Ca 10 mg/L, 500 mL
30090857	Ion standard Na 100 mg/L, 500 mL
30090858	Ion standard Na 10 mg/L, 500 mL
30090859	Ion standard NH ₄ 1000 mg/L, 500 mL
30090860	Ion standard NH ₄ 100 mg/L, 500 mL

Maintenance Solutions

Item No	Description
51350100	Cleaning solution Pepsin-HCl, 250 mL
30045061	Cleaning Solution Pepsin-HCl, 6x250 mL
51350102	Cleaning solution Thiourea, 250 mL
30045062	Cleaning Solution Thiourea, 6x250 mL
51350104	Regeneration solution, 25 mL
30111142	InLab® Storage Solution, 250 mL

Printers and Cables

All-in-one Printing Solution

The all in one printer

Print on continuous paper, continuous self-adhesive labels or on individual labels with all sample information as well as barcodes.

Noiseless speed

The state-of-the-art direct thermal printing technology is clean, vibration-free, extremely fast and exceptionally quiet.

Durable printouts

Under proper storage conditions, the newly developed phenolfree archive-grade fadeproof paper will last up to 25 years, guaranteed.



Printer

Item No	Model
30094673	P-56RUE
30094674	P-58RUE

Accessories

Item No	Description
30094723	Thermal paper roll; 58 mm x Ø 50 mm; 10 pcs
30094724	Self-adhesive paper roll; 58 mm x Ø 50 mm; 10 pcs
30094725	Self-adhesive labels; 56 mm x 18 mm; 6 pcs
12130716	USB Cable 1 m

Printers and Cables

Document Your Results

Print in Your Language

The printer supports the connected instrument languages, whether it operates in English, Russian, Chinese, Japanese or Latin characters.

Fast and Reliable

It is a perfect solution for a simple and easy printout on regular or adhesive paper.

Auto Settings Detection

The printer automatically detects the settings of the connected device. Thanks to this feature no manual setting changes are required.



Printer

Item No	Model
11124300	RS-P25
11124301	USB-P25
11124303	RS-P26
11124304	RS-P28/11

Accessories

Item No	Description
72456	Paper roll (5 units)
11600388	Paper roll, self-adhesive, minimum order quantity 3
65975	Ribbon cartridge black
12120735	Paper rotary axis
12120734	Paper cover
12130716	USB Cable 1 m

Cables

Connect our sensors to almost any meter

METTLER TOLEDO provides a complete range of electrode cables to interface our sensors to almost any meter.



Item No	Description
30281896	InLab® cable MultiPin-BNC/RCA 1.2 m
30281897	InLab® cable MultiPin-BNC/RCA 3 m
30281898	InLab® cable MultiPin-BNC/RCA 5 m
30281899	InLab® cable MultiPin-BNC/4mm 1.2 m
30281910	InLab® cable MultiPin-DIN/RCA 1.2 m
30281911	InLab® cable MultiPin-DIN/4mm 1.2 m
30281912	InLab® cable MultiPin-Lemo 00/2*4 mm 1.2 m
30281913	InLab® cable MultiPin-BNC/RCA 1.8 m IP67
30281915	InLab® cable S7-BNC 1.2 m
30281916	InLab® cable S7-BNC 3 m
30281917	InLab® cable S7-BNC 5 m
30281918	InLab® cable S7-BNC IP67 1.2 m
30281919	InLab® cable S7-DIN 1.2 m
30281920	InLab® cable S7-DIN 3 m
30281921	InLab® cable S7-DIN 5 m
30281922	InLab® cable S7-4mm 1.2 m
30281923	InLab® cable S7-2mm 1.2 m
30281924	InLab® cable S7-RCA 1.2 m
30281925	InLab® cable S7-Lemo 00 1.2 m
30281926	InLab® cable S7-no connector 3 m
30281927	InLab® cable S7-no connector 5 m
30281928	InLab® cable S7-no connector 10 m

Density and Refractometers

Densito

Portable Densitometer

Quick and Error-Free

Immerse the sampling tube, pull the trigger, and read the final result with the temperature directly in the required measurement units!

An Instrument on the Go

Take measurements easily anywhere you go with our practical carrying cases.

Compliant Data Management

Store and keep track of up to 1100 results, and print or transfer them to your PC.



Item No	Model	Description	Product Remarks
51324450	DENSITO 30PX	Densito 30PX	Portable Density Meter / 3 place precision /complete with carry case and accessories

Accessories

Item No	Description
51324103	LabX® direct DE/RE, data transfer software
51325000	Carry case Density/Refracto
51325003	Cleaning tissues, set of 10
51325006	Infrared-Adapter (RS 9 pin, male)
11124303	Printer RS-P26
51324402	Adapter for external syringe
51324406	Battery case
51324408	Battery cover
51325005	Density standards (6 mL), set of 10 with certificate
51324409	Flat seal for battery cover, set of 2
51324404	Holder for sampling tube
51324430	Protective Cover
51324405	Sampling pump complete
51324410	Sampling pump cover
51324407	Screw plug (external syringe)
51324403	Sampling tube (with washer)
51324506	O-Ring sampling pump Density
51325001	Portable LAB Hello CD
51337223	Waste Tube M8
51325001	Software Portable Lab Hello CD
51338010	Water density / refractive index combined standard (9 mL)
51338012	Dodecane density / refractive index combined standard (9 mL)
51338013	2,4-dichlorotoluene density / refractive index combined standard (9 mL)
51338014	1-bromonaphthalene density / refractive index combined standard (9 mL)

Refracto

Compact Portable Refractometers

Quick and Error Free

Place a few drops of sample on the cell, push the button, and read the final result with the temperature directly in the required measurement units!

An Instrument on the Go

Take measurements easily anywhere you go with our practical carrying cases.

Compliant Data Management

Store and keep track of up to 1100 results on your instrument, and print or transfer them to your PC.




Item No	Model	Description	Product Remarks
51324650	REFRACTO 30PX	Refractometer 30PX	Portable Refractometer / 3.5 place precision, measuring range 1.32 ... 1,50 nD / With a big selection of result units (Brix etc.) / complete with carry case and accessories
51324660	REFRACTO 30GS	Refractometer 30GS	Portable High-End Refractometer / 3.5 place precision, measuring range 1.32 ... 1.65 nD / With a big selection of result units (Brix etc.) / complete with carry case and accessories

Accessories

Item No	Description
51324700	Memo covers, set of 10
51324701	Memo papers, set of 10
51324708	Battery case cover with seal
51325000	Carry case Density/Refracto
51325003	Cleaning tissues, set of 10
51325006	Infrared-Adapter (RS 9 pin, male)
51324403	Sampling tube (with washer)
51324103	LabX® direct DE/RE, data transfer software
11124303	Printer RS-P26

Literature

Product Brochures

Front Page	Description
	Brochure SevenExcellence™ Format: A4 Pages: 20
Order Number	
Deutsch	30046380C
English	30046381C
Français	30046382C
Español	30046383C
Italiano	30046384C

Front Page	Description
	Brochure The Right SevenExcellence Format: A4 Pages: 8
Order Number	
Deutsch	30289610
English	30289599
Français	30289611
Español	30289612
Polski	30398733


Front Page	Description
	Brochure SevenCompact™ - Benchtop Format: A4 Pages: 20
Order Number	
Deutsch	30247898
English	30247897
Français	30248017
Español	30248010
Italiano	30248011
Polski	30380104

Front Page	Description
	Brochure SevenGo Duo™ Format: A4 Pages: 16
Order Number	
Deutsch	30208951
English	30208950
Français	30208952
Español	30208953
Italiano	30208954
Polski	30208960


Front Page	Description
	Brochure Seven2Go™ Format: A4 Pages: 12
Order Number	
Deutsch	30212802
English	30212801
Français	30212803
Español	30212805
Italiano	30212804
Turkish	30212810

Front Page	Description
	Brochure FiveGo™ Portable Instruments Format: A4 Pages: 8
Order Number	
Deutsch	30279311
English	30279310
Français	30279312
Español	30279313
Italiano	30279314
Polski	30374249


Front Page	Description
	Brochure FiveEasy™ Bench Instruments Format: A4 Pages: 8
Order Number	
Deutsch	30279226
English	30279225
Français	30279227
Español	30279228
Italiano	30279229
Polski	30374248

Front Page	Description
	Brochure Densito Format: DL Pages: 6
Order Number	
Deutsch	30245924
English	30245923
Français	30245925
Español	30245926
Italiano	30245927

Front Page	Description
	Brochure Refracto Format: 10 x 21cm Pages: 8
Order Number	
Deutsch	51724226
English	51724227
Français	51724228

Front Page	Description
	Brochure Laboratory Solutions Format: A4 Pages: 12
Order Number	
Deutsch	30126699
English	30126698
Français	30126730
Español	30126731
Italiano	30126732

Front Page	Description
	Brochure Solutions for Life Science Format: A4 Pages: 20
Order Number	
Deutsch	51725344
English	51725345
Français	51725346
Español	51725347
Italiano	51725348

Front Page	Description
	Brochure InLab® Sensors Format: A4 Pages: 36
Order Number	
Deutsch	30264254
English	30264253
Français	30264270
Español	30264271
Italiano	30264272
Polski	30315959

Datasheets

Front Page	Description
	Datasheet SevenExcellence™ pH/Ion S500 & S475 Format: A4 Pages: 4
Order Number	
Deutsch	30047045
English	30047046
Français	30047047
Español	30047048
Italiano	30047049

Front Page	Description
	Datasheet SevenExcellence™ pH/mV S400 Format: A4 Pages: 4
Order Number	
Deutsch	30046386
English	30046387
Français	30046388
Español	30046389
Italiano	30046390

Front Page	Description
	Datasheet SevenExcellence™ Conductivity S700 & S470 Format: A4 Pages: 4
Order Number	
Deutsch	30046392
English	30046393
Français	30046394
Español	30046395
Italiano	30046396

Front Page	Description
	Datasheet SevenExcellence™ DO/BOD S600 & S900 Format: A4 Pages: 4
Order Number	
English	30095463

Front Page	Description
	Datasheet uMix™ magnetic stirrer Format: A4 Pages: 2
Order Number	
English	30062412

Front Page	Description
	Datasheet SevenExcellence One Click™ Methods Format: A4 Pages: 2
Order Number	
Deutsch	30065314
English	30065315
Français	30065316
Español	30065317
Italiano	30065318

Front Page	Description
	Datasheet SevenCompact™ S210 Format: A4 Pages: 4
Order Number	
Deutsch	30019067
English	30019066
Français	30019068
Español	30019069
Italiano	30019070

Front Page	Description
	Datasheet SevenCompact™ S220 Format: A4 Pages: 4
Order Number	
Deutsch	30019067
English	30019066
Français	30019068
Español	30019069
Italiano	30019070

Front Page	Description
	Datasheet SevenCompact™ S230 Format: A4 Pages: 4
Order Number	
Deutsch	30019062
English	30019061
Français	30019063
Español	30019064
Italiano	30019065

Front Page	Description
	Datasheet NEW SevenCompact™ Duo 213 Format: A4 Pages: 4
Order Number	
Deutsch	30380099
English	30351097
Français	30380140
Español	30380141
Italiano	30380142
Polski	30380143


Front Page	Description
	Datasheet Seven2Go™ pH Format: A4 Pages: 4
Order Number	
English	30208962
Deutsch	30208963
Français	30208964
Español	30208965
Italiano	30208966
Polski	30208972

Front Page	Description
	Datasheet Seven2Go™ Cond Format: A4 Pages: 4
Order Number	
English	30208974
Deutsch	30208975
Français	30208976
Español	30208977
Italiano	30208978
Polski	30208984


Front Page	Description
	Datasheet Seven2Go™ DO Format: A4 Pages: 4
Order Number	
English	30208986
Deutsch	30208987
Français	30208988
Español	30208989
Italiano	30208990
Polski	30208996


Front Page	Description
	Datasheet EasyDirect™ pH Software Format: A4 Pages: 2
Order Number	
Deutsch	30380118
English	30353939
Français	30380119
Español	30380160
Italiano	30380121
Polski	30380122

Flyers

Front Page	Description
	Flyer UPDATED pH in Fruit and Vegetable Format: 10 x 21 cm Pages: 6
Order Number	
Deutsch	30045011
English	30045012
Français	30045013
Español	30045014
Italiano	30045015

Front Page	Description
	Flyer UPDATED pH in Milk and Dairy Format: 10 x 21 cm Pages: 6
Order Number	
Deutsch	51725217
English	51725218
Français	51725219
Español	51725220
Italiano	51725221

Front Page	Description
	Flyer UPDATED pH in Meat and Poultry Format: 10 x 21 cm Pages: 6
Order Number	
Deutsch	51725222
English	51725223
Français	51725224
Español	51725225
Italiano	51725226

Front Page	Description
	Flyer NEW pH in Food and Beverage Format: 10 x 21 cm Pages: 8
Order Number	
Deutsch	30407671
English	30407670
Français	30407672
Español	30407674
Italiano	30407673
Polski	30407675
Türkçe	30412633

Front Page	Description
	Flyer NEW Electrochemistry Portfolio Format: 10 x 21 cm Pages: 6
Order Number	
Deutsch	30111451
English	30111452
Français	30111453
Español	30111455
Italiano	30111454
Polski	30111456
Türkçe	30111457

Posters

Front Page	Description
	Poster Your pH Calibration Format: A3 Pages: 1
Order Number	
Deutsch	30131317
English	30131316
Français	30131318
Español	30131319
Italiano	30131330

Front Page	Description
	Poster Tips & Tricks in Life Sciences Format: A4 Pages: 1
Order Number	
English	51725349

Front Page	Description
	Poster Art of pH measurement Format: 59,4 x 42 cm Pages: 1
Order Number	
English	30066811B

Posters

Front Page	Description	Front Page	Description	Front Page	Description
	Poster UPDATED A Selection of Applications Format: 29,7 x 100 cm Pages: 1		Poster Five Series Meters Format: A0 Pages: 1		Poster SevenCompact™ Duo Format: Pages: 1
Order Number		Order Number		Order Number	
English	30066733B	English		English	

Application Notes and Guides

Front Page	Description	Front Page	Description	Front Page	Description
	Guide pH Theory Guide Format: A5 Pages: 60		Guide Conductivity Guide Format: A5 Pages: 60		Guide UPDATED ISE Theory Guide Format: A5 Pages: 36
Order Number		Order Number		Order Number	
Deutsch	51300058B	Deutsch	51724715A	English	30414765
English	51300047B	English	51724716A		
Français	51300185B	Français	51724717A		
Polski	304448522	Polski	30448523		
Español	30237094A	Español	30099124A		

Front Page	Description	Front Page	Description	Front Page	Description
	Guide UPDATED pH Workflow Optimization Format: A4 Pages: 20		Application Note perfectION™ Ca2+ Format: A4 Pages: 2		Application Note perfectION™ F- Format: A4 Pages: 2
Order Number		Order Number		Order Number	
Deutsch		English	51725260	English	51725265
English					
Français					
Polski					
Español					
Italiano					

Front Page	Description
	Application Note perfectION™ NO3- Format: A4 Pages: 2
Order Number	
English	51725270

Front Page	Description
	Application Note Protein Samples Format: A5 Pages: 2
Order Number	
English	30398730

Front Page	Description
	Application Note Small Samples Format: A5 Pages: 2
Order Number	
English	30398728

Front Page	Description
	Application Note TRIS Samples Format: A4 Pages: 2
Order Number	
English	30398729

Notes

Notes



<https://mton.store.mt.com/>

To place your order

CH11D278

METTLER TOLEDO OnLine

Im Langacher 44
CH-8606 Greifensee

Prices and specifications are subject to
change without notice
© 01/2018 (last update on 20.12.2017)
METTLER TOLEDO OnLine GmbH