

PURA 30 Water bath


PURA water baths stand for innovative, simple, and safe working in the laboratory. All models (except PURA 4) come with an integrated drain screw for quick and clean draining of the baths. PURA water baths are flexible and can be easily transported through ergonomic side recessed grips. Non-slip rubber feet ensure a firm footing and more safety in the laboratory.



Product features

- Easy operation
- Bright display
- Mains switch is protected against spray water
- Integrated protection against running dry
- Integrated drain screw (except PURA 4)
- No distracting elements in the bath
- Platform included as standard
- Integrated timer
- Non-slip rubber feet
- Ergonomic recessed grips
- Bright, white, easy to read display

Heat-up time

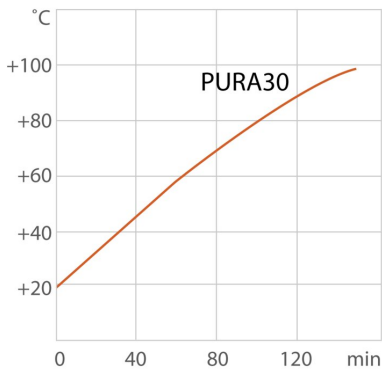

Medium: Water

Performance values

115V/60Hz (Nema N5-15 Plug)	
Heating capacity kW	1.3
Power consumption A	12

Technical data

Available voltage versions		Cooling	
Order No.	9 550 530	Cooling coil	accessory

Available voltage versions:

9550530.22	100-115V/50-60Hz (Nema N5-15 Plug)
9550530.33	230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F)
9550530.04	230V/50-60Hz (UK Plug Type BS1363A)
9550530.05	230V/50-60Hz (CH Plug Type SEV 1011)
9550530.33.chn	230V/50-60Hz (CN Plug)

Bath

Bath tank	Stainless steel
Bath cover	accessory
Usable bath opening in. (W x L / D)	30.3 x 10.6 / 7.1

Electronics

Temperature display	LED
Temperature setting	Keypad
Electronic Timer h:min	00:01 ... 99:59

Dimensions and volumes

Usable immersion depth in.	7.1
Weight lbs	32
Dimensions in. (W x L x H)	33.9 x 13.8 x 10.2
Filling volume l	4.8 ... 36

Other

Classification	Classification I (NFL)
IP Code	IP 21

Waterbath

Insert capacity for test tube racks 13 mm ø pc.	630
Insert capacity for test tube racks 17 mm ø pc.	420
Number of test tube racks pc.	7
Dimensions with bath cover in. (W x L x H)	33.9 x 14.6 x 15.7

Temperature values

Setting the resolution of the temperature display °C	0.1
Working temperature range °C ¹	+18 ... +99.9
Temperature stability °C ²	±0.15
Ambient temperature °C	+5 ... +40
Temperature display resolution °C	0.1

¹ For applications near or below ambient temperature: use a cooling coil or JULABO immersion cooler.

² Temperature stability with bath cover (accessories)

All Benefits

**Ease of use.**

The controls on the front side are easy to reach and use.

**Tilting – no, thank you.**

The PURA water bath design is tiltproof. Non-slip rubber feet prevent slipping and carrying handles simplify the transport.

**Lightweight.**

PURA water baths impress with their low weight and can be flexibly used.

**Brilliant.**

Very bright display makes it easy to read even from a distance.

**Easy cleaning.**

PURA does not incorporate any interfering functional elements. The smooth surfaces can be cleaned quickly and without residue.

**Less is more.**

Thanks to their design, PURA water baths require a minimum amount of water so that even small sample containers stand safely.

**Start. Stopp. Timer.**

PURA water baths offer an internal timer function. After expiration of the set time, a signal sounds and the device either continues operation or switches off.

**Easy handling.**

A frontally integrated drain screw allows clean, safe, and effortless emptying of the baths. (not PURA 4)

**100% Checked.**

100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.

**Green technology.**

Development consistently applied environmentally friendly materials and technologies.

**JULABO. Quality.**


Highest standards of quality for a long product life.

**Quick start.**

Individual JULABO consultation and comprehensive manuals at your disposal.

**Satisfied customers.**

11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.

**Services 24/7.**

Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at www.julabo.com.