

Be sure. **testo**



# Intuitive air velocity and IAQ.

The new testo 440 Combines versatility and maximum convenience.

## The new testo 440 air velocity & IAQ meter: versatility in a compact format.

Welcome to a new era: the new testo 440 combines the benefits of a compact handheld device with intuitive measurement menus and a comprehensive selection of air velocity & IAQ probes. This means you have all measuring tasks on air conditioning and ventilation systems reliably under control.



### **Intuitive:**

Clearly structured measurement menus for volume flow, K-factor, degree of turbulence, heating and cooling load, mold indication and even data logging.

### **Wireless:**

Bluetooth® probes offer greater measuring convenience and eliminate the tangle and clutter of cables.

### **Space-saving:**

A universal handle for all probes means more applications, with less equipment.

### **Clear overview:**

All the essentials combined in a single handheld measuring instrument.

Simultaneous display of 3 measuring values provides accurate results at a glance.

### **Convenience:**

Internal memory for up to 7,500 measurement reports, a USB interface for data export and optional printout of all your measuring values.


### **The testo 440 air velocity & IAQ meter is available in two versions.**

The testo 440 dP model includes an integrated differential pressure sensor. This provides the ability to take measurements at filters as well as Pitot tube and K-factor measurements.




## The intuitive measurement menus: suitable for any application.

Based on our many years of experience in the development of cutting-edge measuring technology, we know exactly what you need to carry out your routine measurements. This is why measurement menus for the essential air conditioning and ventilation applications are already pre-loaded into the testo 440 software. These menus enable you to capture all of your relevant measuring data quickly, efficiently and most importantly, reliably.

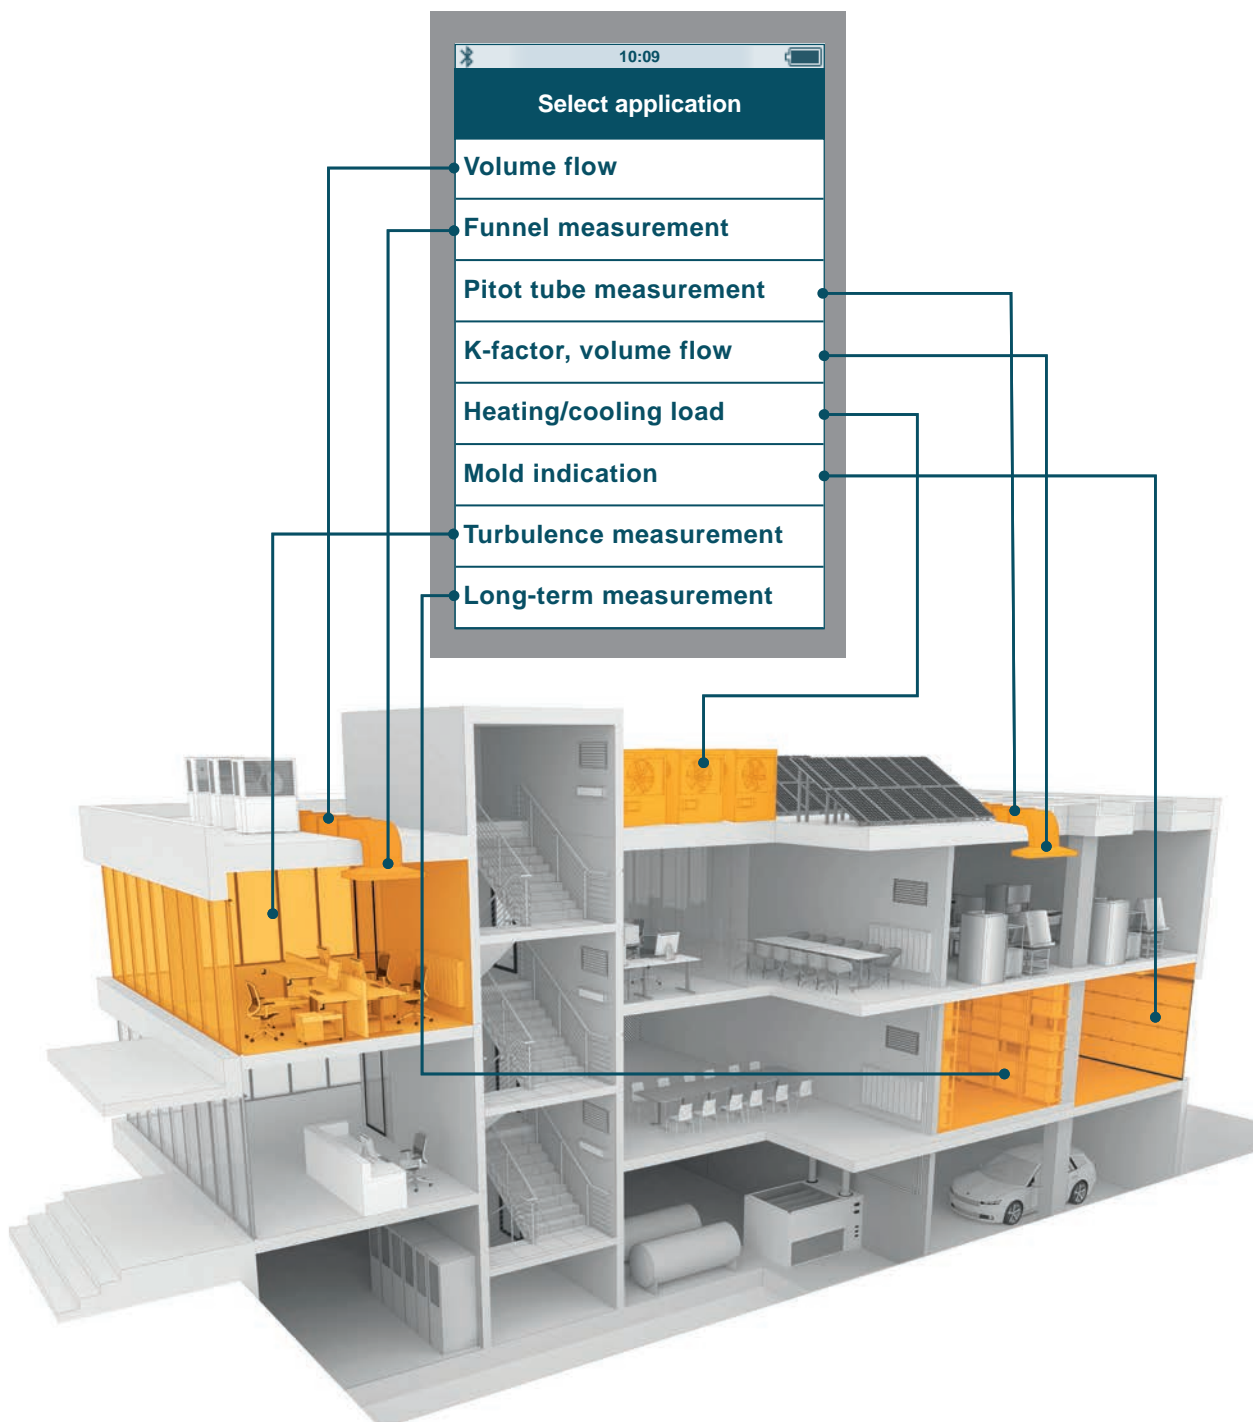

# The testo 440 probe system: you'll never want to work any other way again.

Completely versatile: One universal handle for all air velocity & IAQ probes. This saves you space and reduces extra weight, enabling you to perform accurate measurements in any application. With the testo 440, you will have all air conditioning and ventilation system measurements consistently under control.

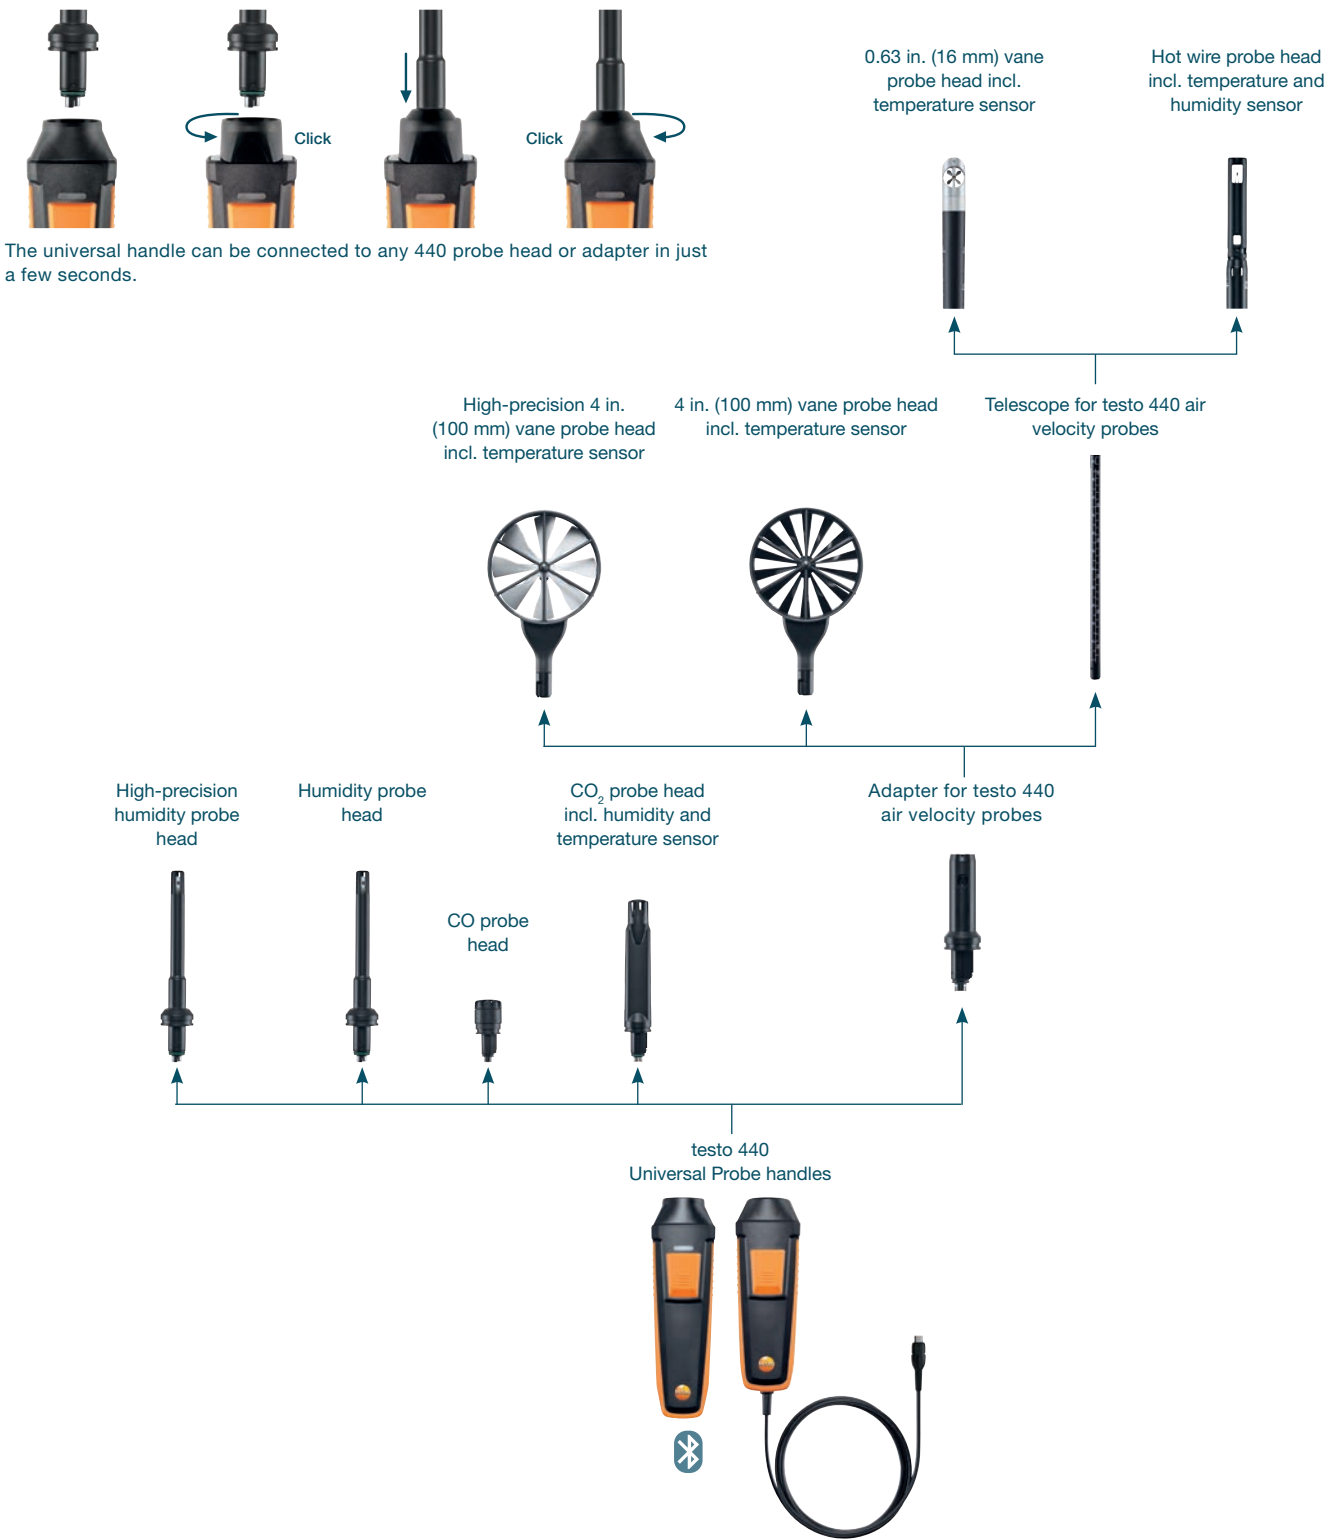

## The testo 440 probe system: in ducts, at outlets, in rooms, at filters or with pitot tubes.



All testo 440 air velocity probes for measurements in ducts have a scaled, extendible shaft, optionally extendible from 3 to 6.5 ft. (1 m to 2 m).



The 4 in. (100 mm) vane probe can be easily combined with the 90° angle and telescopic extension, making measurements at ceiling outlets easier.



Do you need to carry out measurements in places where Bluetooth isn't possible? No problem: simply switch the probe head over from the Bluetooth handle to the cable handle and you're ready to go in seconds.



With the testo 440 dP model, incl. differential pressure sensor, you can ensure that the filters in air conditioning systems are working properly. This confirms no outdoor contamination gets indoors.













For measuring the volume flow in the case of high flow velocities or heavily contaminated flow, we recommend the testo 440 dP and a Pitot tube.







# Your measuring application, our solution: the right probe for every application.

Whatever air conditioning, ventilation or comfort level parameters you want to measure, our comprehensive range of air velocity & IAQ probes provides you with precise and reliable support with your tasks, enabling you to master any measuring challenge.






Air velocity measurement in ducts	
	<b>Hot wire probe</b> incl. temperature and humidity sensor  Bluetooth/fixed cable  
	<b>Vane probe</b> (Ø 0.63 in. / 16 mm) incl. temperature sensor  Bluetooth/fixed cable  
	<b>Hot wire probe</b> incl. temperature sensor  fixed cable 
	<b>Vane probe</b> (Ø 0.63 in. / 16 mm)  fixed cable 























Air velocity measurement at outlets	
	<b>High-precision vane probe</b> (Ø 4 in. / 100 mm) incl. temperature sensor  Bluetooth/fixed cable  
	<b>Vane probe</b> (Ø 4 in. / 100 mm) incl. temperature sensor  Bluetooth/fixed cable  



Heating	
	<b>CO probe</b>  Bluetooth/fixed cable  



**Intelligent calibration concept:** only the probes need to be calibrated. The universal handles and measuring instrument do not need to be calibrated, and can continue to be used for measurements with a different probe. This saves you from valuable down time, ensuring that your work flow will never slow.

Comfort level measurement	
	<b>CO<sub>2</sub> probe</b> incl. temperature and humidity sensor Bluetooth/fixed cable 
	<b>Turbulence probe</b> fixed cable 
	<b>Humidity/temperature probe</b> Bluetooth/fixed cable 
	<b>Lux probe</b> fixed cable 
	<b>CO probe</b> Bluetooth/fixed cable 
Lab and cleanroom	
	<b>High-precision vane probe</b> (Ø 4 in. / 100 mm) incl. temperature sensor Bluetooth/fixed cable 
	<b>High-precision humidity/temperature probe</b> Bluetooth/fixed cable 
	<b>Hot wire probe</b> incl. temperature and humidity sensor Bluetooth/fixed cable 
	<b>Fume hood probe</b> fixed cable 
Industrial processes (drying)	
	<b>Robust humidity/temperature probe</b> for temperatures up to 356 °F (180 °C) fixed cable 



## Measurement in ducts: precision in any cross-section.

In order for air conditioning and ventilation systems to run smoothly and efficiently, the flow velocity in the ventilation duct must be regularly checked. Indoor air quality also

depends on whether the air flow velocities in the duct correspond to the sizing. You can rely on testo 440 kits for measurements in ducts.

### testo 440 Hot Wire Kit




Order no. 0563 4400

### testo 440 0.63 inch (16 mm) Vane Kit



Order no. 0563 4401

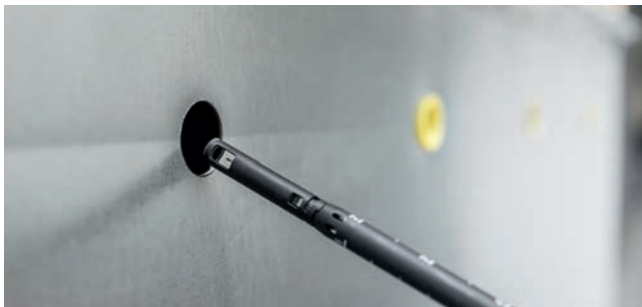



## Measurement at outlets: the optimum climate in no time at all.

For good indoor air quality, the incoming/outgoing air volume flows must be optimally adjusted. The 4 inch (100 mm) vane kit for the testo 440 now makes this task even simpler. With the optional funnel set or pole extension,



you can perform measurements at outgoing air or ceiling outlets conveniently and safely. Our flow straightener even helps you perform accurate measurement on turbulent flows.



### testo 440 4 inch. (100 mm) Vane Kit with BT



Order no. 0563 4403



Optional accessories	Order no.
 testovent 417 Funnel set	0563 4170
 testovent 417 volume flow straightener	0554 4172

Optional accessories	Order no.
 Extendible telescope for testo 440 air velocity probes (14.75 to 40 in. / 37.5 to 100 cm incl. 90° angle)	0554 0960
 testo 605i thermohygrometer with smartphone operation	0560 1605

## Measurement in ducts and at outlets: all air velocity & IAQ parameters at a glance.

Ventilation ducts, plate outlets or ceiling outlets:

With the testo 440 Combo Kits you can always perform precise and reliable measurements in ducts and at outlets.

### testo 440 Air Flow Combo Kit 1 with BT



The image shows the testo 440 Air Flow Combo Kit 1 with BT. It includes a handheld device with a color screen displaying 'Volume Flow', '838.7 cfm', '730 fpm', and '76.3 °F'. To the left of the device are two circular icons: one for 'fpm / m/s' and another for '°F / °C'. Next to the device is a long, thin hot wire probe with a black cable. To the right is a 4-inch (100 mm) vane probe with a black and white fan-like head and a black handle. Below the vane probe is a small black carrying case with the 'testo' logo. A Bluetooth symbol is visible in the bottom right corner of the kit's background.

**Comprising:**

- ✓ testo 440 air velocity & IAQ meter with internal memory and data export function
- ✓ 4 inch (100 mm) vane probe with Bluetooth, incl. temperature sensor
- ✓ Hot wire probe with telescope 2ft. 8in. (0.85 m) incl. temperature sensor, fixed cable 5ft. 9in. (1.8 m)
- ✓ Measurement menu, e.g. for determining the volume flow
- ✓ Combo case for testo 440 and multiple probes

Order no. 0563 4406

### testo 440 Air Flow Combo Kit 2 with BT



The image shows the testo 440 Air Flow Combo Kit 2 with BT. It includes a handheld device with a color screen displaying 'Volume Flow', '838.7 cfm', '730 fpm', and '76.3 °F'. To the left of the device are two circular icons: one for 'fpm / m/s' and another for '°F / °C'. Next to the device is a long, thin hot wire probe with a black cable. To the right is a 4-inch (100 mm) vane probe with a black and white fan-like head and a black handle. Below the vane probe is a small black carrying case with the 'testo' logo. A Bluetooth symbol is visible in the bottom right corner of the kit's background.

**Comprising:**

- ✓ testo 440 air velocity & IAQ meter with internal memory and data export function
- ✓ 4 inch (100 mm) vane probe with Bluetooth, incl. temperature sensor
- ✓ 16 mm vane probe with telescope 2ft. 8in. (0.85 m), fixed cable 5ft. 9in. (1.8 m)
- ✓ Measurement menu, e.g. for determining the volume flow
- ✓ Combo case for testo 440 and multiple probes

Order no. 0563 4407



## Measurement in ducts, at outlets and at filters: as versatile as your challenges.

With the testo 440 dP model (incl. differential pressure sensor), even measurements at filters, as well as Pitot tube and K-factor measurements, can be carried out with ease.

### testo 440 delta P Air Flow Combo Kit 1 with BT



Diagram illustrating the testo 440 delta P Air Flow Combo Kit 1 with BT. The kit includes the testo 440 dP meter, a universal probe handle with Bluetooth, a hot wire probe head, a 4 inch (100 mm) vane probe head, a 3 ft (1 m) telescope, and a 90° angle to fit both probes. The kit is shown with its carrying case.

**Comprising:**

- ✓ testo 440 dP air velocity & IAQ meter incl. differential pressure with internal memory and data export function
- ✓ Universal probe handle with Bluetooth
- ✓ Hot wire probe head incl. temperature and humidity sensor
- ✓ 4 inch (100 mm) vane probe head incl. temperature sensor
- ✓ Telescope 3 ft (1 m) and 90° angle to fit both probes
- ✓ Combo case for testo 440 dP and multiple probes

Order no. 0563 4409

### testo 440 delta P Air Flow ComboKit 2 with BT






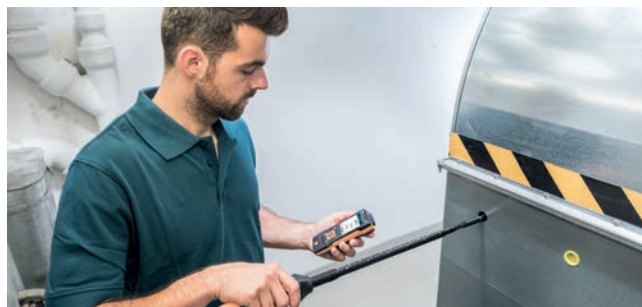
Diagram illustrating the testo 440 delta P Air Flow ComboKit 2 with BT. The kit includes the testo 440 dP meter, a universal probe handle with Bluetooth, a hot wire probe head, a 0.63 inch (16 mm) vane probe head, a 4 inch (100 mm) vane probe head, a 3 ft (1 m) telescope, and a 90° angle for both probes. The kit is shown with its carrying case.

**Comprising:**

- ✓ testo 440 dP air velocity & IAQ meter incl. differential pressure with internal memory and data export function
- ✓ Universal probe handle with Bluetooth
- ✓ 0.63 inch (16 mm) vane probe head
- ✓ 4 inch (100 mm) vane probe head incl. temperature sensor
- ✓ Humidity probe head incl. temperature sensor
- ✓ Telescope 3 ft (1 m) and 90° angle for both probes
- ✓ Combo case for testo 440 dP and multiple probes

Order no. 0563 4410

Optional accessories		Order no.
	Telescope extension (3 ft. / 0.9 m) for testo 440 air velocity probes	0554 0990
	Stainless steel Pitot tube (length 1 ft. 7 in. / 500 mm, Ø 0.3 in. / 7 mm)	0635 2045
	CO probe head	0632 1270






## Measuring comfort level/indoor air quality: no task is too challenging.

Measurement of indoor air quality and comfort levels in the workplace enables precise adjustment of the indoor climate and reduces the risk of staff shortages due to illness.

These special testo 440 kits measure all relevant parameters: CO<sub>2</sub> content of the air, degree of air turbulence, temperature, humidity and luminance.



### testo 440 Indoor Comfort Combo Kit with BT

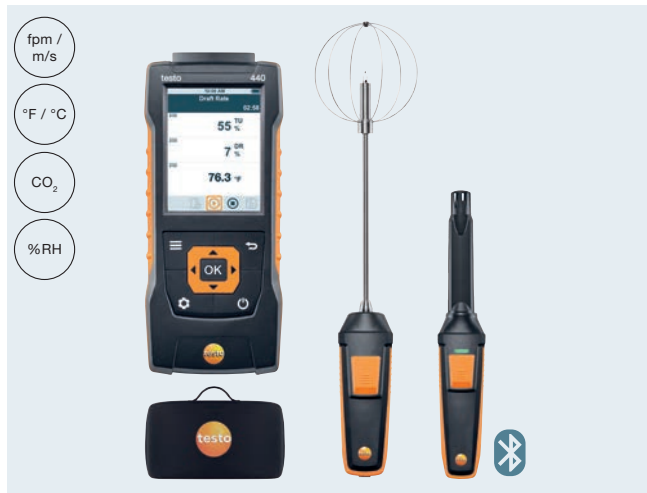

#### Comprising:

- ✓ testo 440 air velocity & IAQ meter with internal memory and data export function
- ✓ Turbulence probe
- ✓ CO<sub>2</sub> probe with Bluetooth, incl. temperature and humidity sensor
- ✓ Combo case for testo 440 and multiple probes

Order no. 0563 4408

### testo 440 CO<sub>2</sub> Kit with BT



Order no. 0563 4405

### testo 440 Humidity Kit with BT



Order no. 0563 4404

### testo 440 Lux Kit



Order no. 0563 4402

## No application too specialized: high-precision probes.

The perfect testo 440 probes are available for your application. Even for control measurements of critical processes that call for the highest level of precision and robust equipment.

Working in industrial environments where high temperatures are common, and in labs where it is crucial to record even the smallest values with a high degree of accuracy, you can be confident that the testo 440 is up to the task.

### CO probe



High-precision probe for measuring the CO concentration indoors (e.g. boiler rooms).

with Bluetooth  
Order no. 0632 1271

fixed cable  
Order no. 0632 1272

### High-precision vane probe



High-precision vane, Ø 4 inch. / 100 mm, incl. temperature sensor with low start-up speed (1 m/s) for flow velocity and temperature. Ideal for laminar flow measurements.

with Bluetooth  
Order no. 0635 9371

fixed cable  
Order no. 0635 9372

### High-precision humidity/ temperature probe



High-precision probe with fast response time for measuring humidity in critical processes. Accuracy:  $\pm(0.6\% \text{ RH} + 0.7\% \text{ of m.v.})$  in the range between 0 and 90% RH.

with Bluetooth  
Order no. 0636 9771

fixed cable  
Order no. 0636 9772

### Fume hood probe



High-precision probe for measuring flow velocity and volume flow in fume hoods as per DIN EN 14175-3/4.

fixed cable  
Order no. 0635 1052

### Robust humidity/temperature probe


















Measures humidity in tough environmental conditions up to 356 °F (+180 °C). Application in industrial outgoing air, bulk materials and climate cabinets.

fixed cable  
Order no. 0636 9775




















## Overview of order details: digital probes.

Probe type		Measuring range	Accuracy	Resolution	Order no.
<b>Digital air velocity probes</b>					
Hot wire probe with Bluetooth, incl. temperature and humidity sensor			$\pm(0.03 + 4\% \text{ of m.v.})$ (0 to 98.43 fpm) $\pm(1.6 \text{ ft/s} + 5\% \text{ of m.v.})$ (3939 to 5905.5 fpm)		0635 1571
Hot wire probe, fixed cable, incl. temperature and humidity sensor		0 to 9842.5 fpm -4 to 158 °F 5 to 95% RH	$\pm 0.5 \text{ °F}$ (32 to 158 °F) $\pm 0.8 \text{ °F}$ (-4 to 32 °F) $\pm 3.0\% \text{ RH}$ (10 to 35% RH) $\pm 2.0\% \text{ RH}$ (35 to 65% RH) $\pm 3.0\% \text{ RH}$ (65 to 90% RH) $\pm 5\% \text{ RH}$ (remaining meas. range)	1.97 fpm 0.1 °F 0.1% RH	0635 1572
Hot wire probe head, incl. temperature and humidity sensor					0635 1570
Vane probe (Ø .63 in / 16 mm) with Bluetooth, incl. temperature sensor					0635 9571
Vane probe (Ø .63 in / 16 mm), fixed cable, incl. temperature sensor		118 to 9842.5 fpm 14 to 158 °F	$\pm(39.37 \text{ fpm} + 1\% \text{ of m.v.})$ (118 to 7874 fpm) $\pm(39.37 \text{ fpm} + 2\% \text{ of m.v.})$ (7874 to 9842.5 fpm) $\pm 3.2 \text{ °F}$	1.97 fpm 0.1 °F	0635 9572
Vane probe head (Ø .63 in / 16 mm), incl. temperature sensor					0635 9570
Hot wire probe, fixed cable, incl. temperature sensor		0 to 5905.5 fpm -4 to 158 °F	$\pm(1.97 \text{ fpm} + 4\% \text{ of m.v.})$ (0 to 3937 fpm) $\pm(98.42 \text{ fpm} + 5\% \text{ of m.v.})$ $\pm 0.9 \text{ °F}$	1.97 fpm 0.1 °F	0635 1032
Vane probe (Ø .63 in / 16 mm) fixed cable		118 to 9842.5 fpm	$\pm(39.37 \text{ fpm} + 1\% \text{ of m.v.})$ (118 to 7874 fpm) $\pm(39.37 \text{ fpm} + 2\% \text{ of m.v.})$ (7874 to 9842.5 fpm)	19.7 fpm	0635 9532
Fume hood probe, fixed cable		0 to 984.25 fpm 32 to +122 °F	$\pm(39.37 \text{ fpm} + 5\% \text{ of m.v.})$ (0 to 984.25 fpm) $\pm 0.9 \text{ °F}$	1.97 fpm 0.1 °F	0635 1052
<b>To measure flows in ducts with a large cross-section, we recommend an extension set (0554 0990). This enables the telescope to be extended to up to 2 m for all air velocity probes with an interchangeable handle.</b>					
High-precision vane probe (Ø 4 inch / 100 mm) with Bluetooth, including temperature sensor					0635 9371
High-precision vane probe (Ø 4 inch / 100 mm), fixed cable, incl. temperature sensor		19.7 to 2952.8 fpm -4 to 158 °F	$\pm(1.97 \text{ fpm} + 1.5\% \text{ of m.v.})$ (19.7 to 2952.8 fpm) $\pm 0.9 \text{ °F}$	1.97 fpm 0.1 °F	0635 9372
High-precision vane probe head (Ø 4 inch / 100 mm), incl. temperature sensor					0635 9370
Vane probe (Ø 4 inch / 100 mm) with Bluetooth, incl. temperature sensor					0635 9431
Vane probe (Ø 4 inch / 100 mm), fixed cable, incl. temperature sensor		59 to 6889.8 fpm -4 to 158 °F	$\pm(0.1 \text{ m/s} + 1.5\% \text{ of m.v.})$ 59 to 3937 fpm) $\pm(39.37 \text{ fpm} + 1.5\% \text{ of m.v.})$ (3939 to 6889.76 fpm) $\pm 0.9 \text{ °F}$	1.97 fpm 0.1 °F	0635 9432
Vane probe head (Ø 4 inch / 100 mm), incl. temperature sensor					0635 9430
<b>For convenient ceiling measurements, the telescope with 90° angle (0550 0960) has been developed. It can be easily attached to the 4 inch (100 mm) vane probes.</b>					














<sup>1)</sup> For use with cable handle (order no. 0554 2222) or Bluetooth handle (order no. 0554 1111) in conjunction with an adapter (order no. 0554 2160).









Probe type		Measuring range	Accuracy	Resolution	Order no.
<b>Digital humidity probes</b>					
Humidity/temperature probe with Bluetooth					0636 9731
Humidity/temperature probe, fixed cable		0 to 100% RH -4 to 158°F	±2% RH (5 to 90% RH) ±0.9 °F	0.1% RH 0.1 °F	0636 9732
Humidity/temperature probe head					0636 9730
High-precision humidity/temperature probe with Bluetooth					0636 9771
High-precision humidity/temperature probe, fixed cable		0 to 100% RH -4 to 158°F	±(0.6% RH + 0.7% of m.v.) (0 to 90% RH) ±(1.0% RH + 0.7% of m.v.) (90 to 100% RH) ±0.5 °F (59 to 86 °F) ±0.9 °F (remaining meas. range)	0.01% RH 0.1 °F	0636 9772
High-precision humidity/temperature probe head					0636 9770
Robust humidity/temperature probe for temperatures up to 356 °F, fixed cable		0 to 100% RH -4 to 356°F	±3% RH (0 to 2% RH) ±2% RH (2.1 to 98% RH) ±3% RH (98.1 to 100% RH) ±0.9 °F (-4 to 32 °F) ±0.7 °F (32 to 122°F) ±0.9 °F (122 to 356 °F)	0.1% RH 0.1 °F	0636 9775
<b>Digital comfort probes</b>					
Turbulence probe, fixed cable		0 to 984.25 fpm 32 to 122 °F	±(5.9 fpm + 4% of m.v.) (0 to 984.25 fpm) ±0.9 °F	1.97 fpm 0.1 °F	0628 0152
Lux probe, fixed cable		0 to 100,000 lux	Class C According to DIN 5032-7 f1 = 6% = V-Lambda f2 = 6% cos	0.1 lux (< 10,000 lux) 1 lux (≥ 10,000 lux)	0635 0551
CO <sub>2</sub> probe with Bluetooth, incl. temperature and humidity sensor			±(50 ppm + 3% of m.v.) (0 to 5000 ppm) ±(100 ppm + 5% of m.v.) (5001 to 10,000 ppm) ±3% RH (10 to 35% RH) ±2% RH (35 to 65% RH) ±3% RH (65 to 90% RH) ±5% RH (remaining meas. range) ±0.9 °F		0632 1551
CO <sub>2</sub> probe, fixed cable, incl. temperature and humidity sensor		0 to 10,000 ppm CO <sub>2</sub> 5 to +95% RH 32 to 122 °F		1 ppm 0.1% RH 0.1 °F	0632 1552
CO <sub>2</sub> probe head incl. temperature and humidity sensor					0632 1550
CO probe with Bluetooth					0632 1271
CO probe, fixed cable		0 to 500 ppm	±3 ppm (0 to 30 ppm) ±10% of m.v. (30.1 to 500 ppm)	0.1 ppm	0632 1272
CO probe head					0632 1270
<b>Probe handle and adapter</b>					
Cable handle for connecting testo 440 probe heads					0554 2222
Bluetooth handle for connecting testo 440 probe heads					0554 1111
Handle adapter for connecting testo 440 air velocity probes					0554 2160

<sup>2)</sup> For use with cable handle (order no. 0554 2222) or Bluetooth handle (order no. 0554 1111).

## Overview of order details: Kits, measuring instruments, probes and accessories.

testo 440 / testo 440 dP kits		Order no.
	testo 440 Hot Wire Kit	0563 4400
	testo 440 0.6 inch (16 mm) Vane Kit	0563 4401
	testo 440 Lux Kit	0563 4402
	testo 440 4 inch (100 mm) Vane Kit with BT	0563 4403
	testo 440 Humidity Kit with BT	0563 4404
	testo 440 CO <sub>2</sub> Kit with BT	0563 4405
	testo 440 Air Flow ComboKit 1 with BT	0563 4406
	testo 440 Air Flow ComboKit 2 with BT	0563 4407
	testo 440 Indoor Comfort ComboKit with BT	0563 4408
	testo 440 delta P Air Flow Combo Kit 1 with BT	0563 4409
	testo 440 delta P Air Flow Combo Kit 2 with BT	0563 4410
testo 440 instruments		Order no.
	testo 440 Air velocity & IAQ meter	0560 4401
	testo 440 dP Air velocity & IAQ meter incl. differential pressure	0560 4402

Accessories		Order no.
	Extendible telescope for testo 440 flow probes (14.8 to 39.3 in / 37.5 to 100 cm incl. 90° angle)	0554 0960
	Service case for volume flow measurement	0516 4900
	Combo case for testo 440 and multiple probes	0516 4401
Temperature probe		Order no.
	Fast-reaction surface probe (TC type K)	0602 0393
	Robust air probe, TC type K, fixed cable	0602 1793
	Surface probe with widened measuring tip (TC type K)	0602 1993
	Temperature probe with Velcro strip (TC type K)	0628 0020
	Robust air temperature probe (NTC)	0615 1712
	Clamp probe (NTC) for measurements on pipes (Ø 6 - 35 mm)	0615 5505
	Watertight immersion/penetration probe (NTC)	0615 1212
Further accessories and DAkkS and ISO certificates can be found on <a href="http://www.testo.com">www.testo.com</a>		